


8 Channel HD CCTV System DVR



Features

- Supports AHD, HD-TVI, Analog cameras – D1, 960H, 720p, 1080p Resolution Cameras
- Full channel @1080P resolution real time
- HDMI/VGA output at up to 1920×1080P
- H.264 video compression
- All ch synchronous playback
- Search by Thumbnail Images (Day, Hour, Minute Scale)
- Windows, Macintosh, iOS, Android Apps

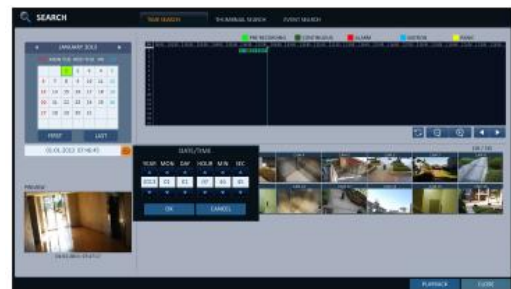

Rear Panel

1. Video in(BNC)
2. Audio in(RCA)
3. Spot Out 1(1~8ch multi view)
Spot Out 2 (1ch view)
4. VGA
5. HDMI
6. eSATA
7. USB
8. Network
9. DC12V input
10. Audio out
11. Relay out 1~4, Alarm in 1~8
12. RS485, Alarm Out 1~8,RS232

MODEL	iDVR-PRO8H
Video / Audio input	
Video Compression	H.264
Video Input	8ch BNC (Analog, TVI, AHD Hybrid)
Audio Compression	G.711u
Audio	8 In(RCA), 1 out(RCA), CODEC:G.711
Video output	
HDMI Output	1 X HDMI (1920X1080)-Main/Sub Monitor
VGA Output	1 X VGA (1920 X 1080)-Main/Sub Monitor
Frame Rate	30 fps per channel @1920x1080 Res.
SPOT OUT 1	1~8 ch Multi View BNC spot out
SPOT OUT 2	Single ch View BNC sopt out
Playback	
Playback Speed	Variable Playback (up to 64x)
Instant playback	Instant playback mode for quick review
Search Mode	Calendar, Event, Thumbnail Search
D Zoom	Digital Zoom on Live & Playback
Rec. Resolution	1080P/720P/WD1/D1/2CIF/CIF @ 30fps
Hard Disk	
Capacity	Up to 6TB capacity for each HDD
SATA	4 HDD + 1DVD
External Interface	
Network Interface	1 RJ45 10M/100M
USB Interface	2 @ Front, 1 @ Rear
Serial Interface	RS-485 for PTZ & Keyboard
Alarm in	8 ch
Alarm out	4ch Relay + 4ch Open/Close
General	
Power Supply	Output : DC12V,10A , Input:100~240V AC, 50~60Hz
Operate Temperature	32°F~104°F
Chassis	19-inch rack-mounted 2U chassis
Dimension	16.9 x 14.5 x 3.5 inch
Weight	10 lb
CMS/Web/Smart Phone	
CMS	Windows & Mac Software
Web	IE, Chrome, Firefox
Smart Phone Apps	iPhone, iPad, Android
DDNS	Free DDNS service(Preregistered)

