



10X Zoom & Pan/Tilt Vandal Proof Dome Camera 1/4" SONY Super HAD CCD, 360° Endless Rotation 64 Preset, Fast Speed, Built-in OSD

FEATURES

- Weather-proof Compact PTZ Dome Camera
- Max 93°/sec panning, 64 Preset positions
- Pan - 360°(Endless), Tilt - 5°~90°
- 100X Zoom(Optical : 10X, Digital : 10X)
- Powerful & Level selectable BLC, Auto focus / Auto IRIS
- Built-in OSD, RS-485 interface
- 3.8~38.0mm AF




Product Code: PTZ-A10X

Optional Brackets (Not included)

Wall Bracket (PTZ-B2)



Pendant Bracket
(PTZ-B3)

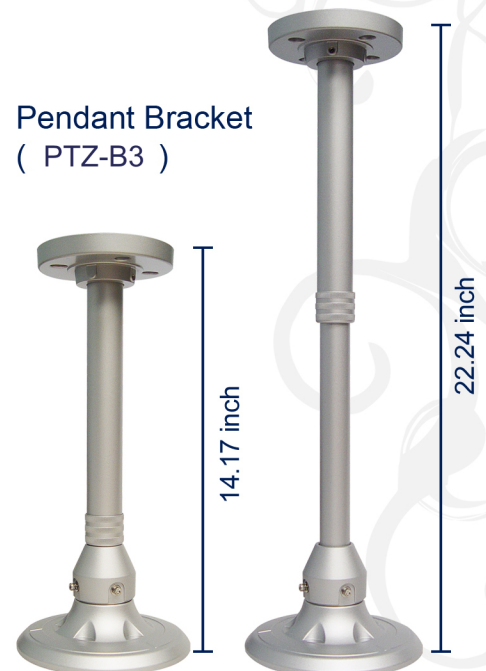

SPECIFICATIONS

Image Sensor	1/4" Sony Super HAD CCD
Effective Pixel	NTSC: 768(H) x 494(V)
Scanning System	2:1 Interlace
Sync. System	Internal
Scan. Freq. (Hor.)	15.734 KHz (NTSC)
Scan. Freq. (Vert.)	59.94 Hz (NTSC)
Resolution	Tru-480 TV Lines (Color) / Tru-560 TV Lines (B/W)
Video Output	1.0 Vp-p (Sync. Negative) with 75Ω Termination
S/N Ratio	50 dB or More (AGC Off)
Min. Illumination	0.1 Lux
Gamma	r = 0.45
Shutter Speed	Auto: 1/60~1/10,000sec (NTSC)
White Balance	ATW / AWC / Manual[R,B] / 3,200°K / 5,600°K
OSD	YES
ZOOM	Optical 10X, Digital 10X
Focal Length	f=3.8(W)~38.0(T)mm / F1.8(W)~2.8(T)
Angle of View	51.2° (Wide End), 5.58° (Tele End)
Min. Working Distance	0.35M (Wide End), 0.8M (Tele End)
Moving Speed	Pan: 9°/s~93°/s, Tilt: 9°/s~66°/s
Moving Angle	Pan: 0°~360°, Tilt: 5°~90°
Communication	RS-485
Camera ID Setup	1~255 Selectable
Protocol	Pelco-D, Pelco-P
Baud rate	2400bps, 4800bps, 9600bps
Power Supply	Regulated 12V DC
Consumption Current	Max. 800mA
Operating Temp.	14 °F to 122 °F
Storage Temp. Range	- 4 °F to 140 °F
Dimensions	Ø5.9 X 5.28(H) inch
Weight	Approx. 2.64 lb