# ZAVIO P4520 5MP Panoromic Fisheye IP Camera






- 180° / 360° Fisheye Mini Dome
- H.265, 50% lower bitrate
- -1/1.8" 5MPCMOSsensor

-WDR



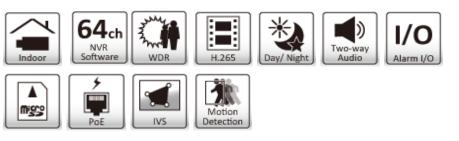

The P4520 is a compact, yet powerful fisheye dome camera featuring many cutting-edge technologies. The high resolution fisheye lens provides 360° surround view with image detail even at the normally weak edges; the huge 1/1.8" 5-Megapixel image sensor ensures superior low light sensitivity; our advanced fisheye dewarping algorithms keep distortion lower than others while putting less computing loading on the server; and last but not least, video can be streamed in the ultra-efficient H.265 format, which has up to 50% lower bitrates and cuts your bandwidth and storage requirements in half.

It also features a removable IR-cut filter, MicroSD/SDHC/SDXC edge storage, PoE, two-way audio and alarm input/output, making it a extremely versatile camera with maximum coverage.

#### Related models

Model Name	P4320
Feature	180° / 360° Fisheye Mini Dome
	3MP
	H.265
	WDR
	PoE
	-



### Datasheet 2

## **Features**

- . 1/1.8" OMOS sensor
- . H.265, H.264, and Motion JPEG compression
- . 30fps@2560 x 1920
- . 1.49mm, F2.0 fisheye lens
- . WDR
- True day & night with automatic removable IR-cut filter
- . Two-way audio and built-in microphone
- . 1 x alarm input, 1 x alarm output

- . Edge storage
- . RTC with built-in battery
- . SSL v3 advanced HTTPS encryption
- Supports Samba network storage
- . Multi-lingual user interface
- . ONVIF 2.4 and Profile Scompliant
- . Free 64-channel ZAVIO CamGraba 2.0 NVR software

## **WDR**



WDRoff



WDRon

## **Applications**





1. Office 2. Public Area

## **IP Surveillance Solutions**

### . Free 64ch NVR Software

The most professional NVR software you can get for free!

- Support up to 64 channels
- Up to 128 channels remote live view
- Remote playback 16 channels
- Multi-site / multi-server
- Transcoding (record high quality, transcode to different resolution
- / frame rate for remote client to save bandwidth)
- iOS' Android mobile dient (multi-channel live view | playback | PTZ & I/O control)
- E-maps (up to 4 layers | unlimited number of maps | video preview)
- Dual monitor
- ePTZ
- Multi-lingual user interface



### . ONVIF

All IP cameras are ONVIF2.x & Profile S compliant, and continuously upgraded to comply with the latest versions



#### . NVR Recorders

The most cost-efficient way to professionally view, record and manage up to 32 Full HD cameras

- Up to 32 channels
- Up to 4HDDs or 16TB of storage
- Up to 160Mbps recording throughput
- Free CMSup to 128 channels remote live view
- Free P2P service, no more router settings
- One dick setup
- HDMI, VGA dual video output
- RAID 0,1



## ZAVIO P4520 5MP Panoromic Fisheye IP Camera

	P4520 5MP Paparomic Fisheve IP Camora		Aluminum casing
	P4520 5MP Panoromic Fisheye IP Camera	Casing	Aluminum casing
mage sensor	1/1.8" megapixel CMOS sensor	Power	DC12V or PoEIEE 802.3af dass 1
ens	F2.0, 1.49mm		Power consumption: Max 4.65W
Angle of view	180° horizontal	Operating conditions	-10 ~ 50 °C ( 14 ~ 122 °F)
	160° vertical		
Vin illumination	0.05 lux @ F2.0 (color)	management, and	configuration. Configuration of backup and restore firmware
	0.001 lux @ F2.0 (B/W)		upgrades over HTTP, firmware available at www.zavio.com
Day/Night function	Mechanical IRcut filter	Minimum web	Pentium 4 2.8GHz (or equivalent AMD)
Video		browsing	256MB RAM graphic cards
/ideo compression	H.264 baseline/ main profile/ high profile	requirement	(or equivalent on-board graphic cards)
	H.265		1G RAM
Resolutions	5MPMode		Williuow AF, Visia, Ul Williuows / Mac OSLeonard 10 5 or later
	2 profiles from 2560 x 1920 to 640 x 360		Mac OS Leopard 10.5 or later
	2 profiles from 640 x 480 to 640 x 360	Dimensions	φ115 x 54mm (φ4.53" x 2.13")
	2MPMode	Weight	240g (0.53lb)
	2 profiles from 1080 x 720 to 640 x 360		Quick installation guide, CD (Camera Installation Tool, Video
	2 profiles from 640 x 480 to 640 x 360		Management Tool, User Manuals, Camera Language Packs)
Frame rate	H.264/ H.265: up to 60 fps at 2MPMode	_	mounting and connector kits
I AITIC I ALC		Certification	OE, FCC
video streaming	up to 30 fps at 5MP Mode		
-	Smultaneous H.264, H.265	Integration	ZAVIO Camoraba in System software, for viewing, recording
	Controllable frame rate and bandwidth	coftware	
	Support unicast		and archiving up to 64 cameras
	(Real Time Streaming Protocol)		See http://www.zavio.com/softwaredownloads.php
mage settings	Rotation: mirror, flip, mirror flip		for more software application
	WDR	Part Names and	
	Brightness, contrast, saturation, sharpness		External I/O
	Overlay capabilities: time, date, text and privacy Image	Ethernet Socket -	connector
	ROI		
	Defog	DC12V/1A	- Routing Hole
Audio			
Audio streaming	Two-way (full duplex)		
Audio compression	G.711 µ law, a law, AMR	_	
	Line input and line output	_	
Network			
œunty	Multiple user access levels with password protection,		
	HTTPSencryption		
	HTTPSencryption Banjaur TCP/ IP. DHCP. DNS. DvpDNS. PPDF. ARP. ICMP.	Micros (SDHC	
	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP,	MicroSD/SDHC	
	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL,		
users	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP	Network LED Indicato	
	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users		r
Alarm and Eve	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users nt Support	Network LED Indicato	
Osers Alarm and Eve Alarm and event	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users nt Support Input: alarm buffer, alarm input, motion detection	Network LED Indicato Power LED Indicator	r
Alarm and Eve	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users nt Support Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out	Network LED Indicato	r
Alarm and Eve Alarm and event	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users nt Support Input: alarm buffer, alarm input, motion detection	Network LED Indicato Power LED Indicator	r
Alarm and Even Alarm and event management	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users nt Support Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out	Network LED Indicato Power LED Indicator	r
Alarm and Even Alarm and event management	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users nt Support Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer	Network LED Indicato Power LED Indicator	r
Alarm and Even Alarm and event management	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users nt Support Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out	Network LED Indicato Power LED Indicator	r
Alarm and Even Alarm and event management	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users nt Support Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer	Network LED Indicato Power LED Indicator	Reset
Alarm and Eve Alarm and event	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RI-45 Ethernet 10/ 100/ 1000 Base-T (PoE),	Network LED Indicato Power LED Indicator	Reset
Alarm and Even Alarm and event management	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RJ45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button	Network LED Indicato Power LED Indicator	Reset
Alarm and Even Alarm and event management	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RJ45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button 2pin terminal block for DC power	Network LED Indicato Power LED Indicator	Reset
Alarm and Even Alarm and event management System	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RJ45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button 2pin terminal block for DC power 6pin cable for 1 alarm input, 1 output,	Network LED Indicato Power LED Indicator	
Alarm and Even Alarm and event management System	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RI45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button 2pin terminal block for DC power 6pin cable for 1 alarm input, 1 output, 1 audio line in 1 audio line out	Network LED Indicato Power LED Indicator	Reset
Alarm and Even Alarm and event management System	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RI-45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button 2pin terminal block for DC power 6pin cable for 1 alarm input, 1 output, 1 audio line in 1 audio line out MicroSD Card slot	Network LED Indicato Power LED Indicator	
Alarm and Even Alarm and event management System	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RJ-45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button 2pin terminal block for DC power 6pin cable for 1 alarm input, 1 output, 1 audio line in 1 audio line out MicroSD Card slot Power status indicator Network link indicator	Network LED Indicato Power LED Indicator	
Alarm and Even Alarm and event management System	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RJ45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button 2pin terminal block for DC power 6pin cable for 1 alarm input, 1 output, 1 audio line in 1 audio line out MicroSD Card slot Power status indicator Network link indicator ONVIF2 4 & Profile S	Network LED Indicato Power LED Indicator	
Alarm and Even Alarm and event management	Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPOE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP users <b>nt Support</b> Input: alarm buffer, alarm input, motion detection Output: network storage, FTP, SMTP, HTTP event, alarm out Pre- and post alarm buffer RJ-45 Ethernet 10/ 100/ 1000 Base-T (PoE), Reset button 2pin terminal block for DC power 6pin cable for 1 alarm input, 1 output, 1 audio line in 1 audio line out MicroSD Card slot Power status indicator Network link indicator	Network LED Indicato Power LED Indicator	

