

# NAS NVRmini

Linux Embedded Standalone




## Support H.264 & Megapixel Camera

- Server-Client Architecture
- Recording without PC turning on
- Easy Installation (only 4 steps)
- Supported by NUUO CMS
- Web-based live view and playback
- Support RAID 0, 1, 5, 5+spare, 10
- Support POS

## Best Solution for Chain Store & Home User



Chain store



Laundry



Bank Branch




ATM



City Surveillance

Chain Store, Laundry, Bank Branch, ATM, City Surveillance, E-home, Government, Museum, VRS, Supermarket...etc

## Server-Client Architecture

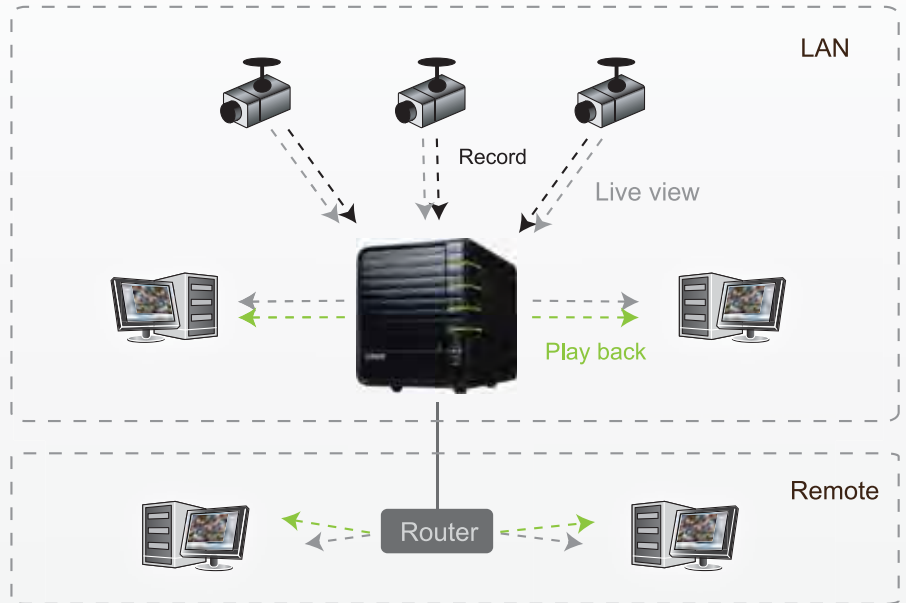

## Specification

Model	NV-2040	NV-4080	NV-4160
Recording Camera	1-4	1-8	1-16
Number of Drives	2xSATA II	4xSATA II	4xSATA II
RAID Level	RAID 0,1	RAID 0, 1, 5, 5+Spare, 10	RAID 0, 1, 5, 5+Spare, 10
I/O Interface	1xUSB 2.0 (for UPS)	2xUSB 2.0 (for UPS)	2xUSB 2.0 (for UPS)
LAN Transmission Speed	10/100/1000 Mbps (RJ45)	10/100/1000 Mbps (RJ45)	10/100/1000 Mbps (RJ45)
Dimension	92.0 x 145.2 x 213.2 mm	188.2 x 152.5 x 227.6 mm	188.2 x 152.5 x 227.6 mm
Temperature	Operating: 5°C to 35°C		
Humidity	Operating: 10%-85%		
Compression Format	MPEG4, M-JPEG,H264 (Depend on IP camera)		
Recording Performance	Up to 120 fps (NTSC) /100 fps (PAL) at D1	Up to 240 fps (NTSC) /200 fps (PAL) at D1	Total bitrate : 22Mbps
Remote PC CPU	Pentium 4 – 2.4 GHz	Pentium 4 – 2.8 GHz	Pentium 4 – 2.8 GHz
Remote PC RAM	512 MB		
User Interface	HTTP Web browser - Internet Explorer 6 or later/ NUUO Client Application Program		
Recording Type	Continuous record, Record by schedule, Manual record, Event trigger record, Digital input trigger record		
Remote Live View Control	Live view, Preset / Go, PTZ functions, Remote I/O, Snapshot		
Audio & Video Recording	Audio & video recording in synchronization		
POS	Live view, record and search for every transaction		
Auto Backup	Automatically backup the recorded video of the previous date to FTP		
Smart Search	General motion, Missing object, Foreign object, Lose focus, Camera occlusion		
Remote client OS Supported	Windows 2000/ XP/ 2003/ Vista		
Remote Live View connections	Live view maximum 16 connections at the same time		
IP Camera Brand Support	ACTi, ArecontVision, Axis, Cisco, D-Link, IQinVision, LevelOne, Lumenera, Linksys, Mobotix, Panasonic, Sony, Vivotek, Zavio		

## Support 14 Camera Brands & Over 350 Models

