


## NUUO NVRsolo Specification

### NUUO NVRsolo



### System Diagram

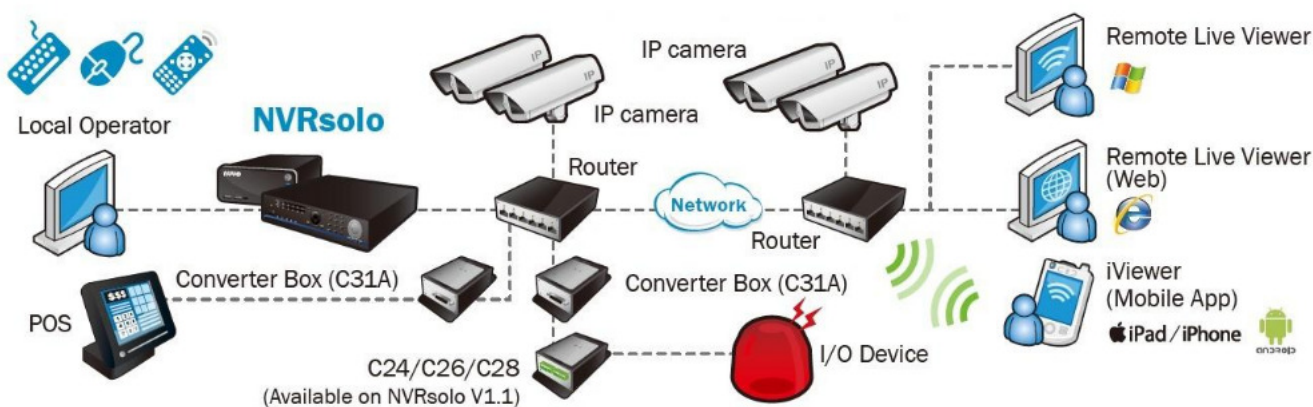

### Main Features

- Linux embedded – safer solution against PC crashes and virus attacks
- **One-click setup for more than 80 brands of IP cameras**
- **4 CH real time @1080p live display**
- **ezNUUO – free from router settings for web/ mobile viewing**
- **Point of Sale (POS)<sup>1</sup>**
- **Alarm source of NUUO Central Management System**
- RAID 0,1 for maximum capacity or data protection<sup>2</sup>
- Support megapixel cameras and H.264 compression format
- Remote I/O solution and camera I/O integration

<sup>1</sup> POS device configuration is only available in web.

<sup>2</sup> NS-1040/NS-1080 only.

- Real-time digital output, Email alert and push notification on mobile
- Digital watermark
- NTP server synchronization
- Compatible with touch panel<sup>3</sup>
- Support 85 brands of IP cameras and 2151 models<sup>4</sup> (with free monthly update)

## Remote Client Application

- **Support Stream Profile for remote live view bandwidth control (Original / 300 kbps / 100 kbps)**
- Support mobile client for iPhone / iPad / Android<sup>5</sup>
- Up to 128 CH remote live view with multiple monitors

## Web

- Web-based configuration, live viewer, playback (Recommend on IE 8 and later)
- Online GUI recording schedule
- Panorama 360° PTZ (ImmerVision and VIVOTEK fisheye)
- Generic dewarp (fisheye)
- Digital PTZ and multi-view
- Support joystick for easier camera control
- Playback with 5 types of intelligent event search
- E-map with indicator
- Auto port-forwarding

## Specifications

Model	NS-1040	NS-1080	NS-8060
<b>Maximum Numbers of Licenses (Recording/Playback)</b>	8 <sup>6</sup>	8	16 <sup>7</sup>
<b>Based License</b>	4	8	6
<b>Video Output</b>	HDMI, VGA		
<b>Output Resolution</b>	1920x1080, 1280x1024, 1280x720, 1024x768		
<b>Decoding Capacity (H.264)</b>	120fps @1080p or 240fps @720p (Up to 2560x1600 <sup>8</sup> per channel)		
<b>Decoding Capacity (MPEG4)</b>	120fps @1080p or 240fps @720p (Up to 1920x1080 <sup>9</sup> per channel)		
<b>Decoding Capacity (MJPEG)</b>	15fps @720p		
<b>Throughput</b>	60Mbps		80Mbps
<b>Number of Drives</b>	1 x 3.5" SATA II / 2 x 2.5" SATA II		8 x 3.5" SATA II
<b>External Storage</b>	1 x eSATA		1 x eSATA
<b>Max Storage Per Drive</b>	4TB		4TB
<b>RAID Level</b>	RAID 0,1		Single
<b>RAM</b>	DDR3 2GB		DDR3 2GB
<b>I/O Interface</b>	5 x USB 2.0 (for keyboard, mouse, UPS, USB flash drive)		4 x USB 2.0 (for keyboard, mouse, UPS, USB flash drive)
<b>On-Box I/O</b>	0/0		16/4
<b>LAN</b>	2 x Gigabit Port, RJ45		
<b>LAN Transmission Speed</b>	10/100/1000 Mbps		
<b>Voltage</b>	DC 12V 4A		AC 100V~240V, 3.5A~1.5A, 60-50Hz
<b>Power Consumption</b>	Full loading: 20W Max: 48W		Full loading: 80W Max: 250W

<sup>3</sup> Acer T232HL and ViewSonic TD2220

<sup>4</sup> The data is updated for DP 2.16.

<sup>5</sup> Please check the supported camera spec list on website. Besides, to use this feature, you have to enable 2<sup>nd</sup> stream function on setting page first.

<sup>6</sup> NS-1040 can support up to 8 cameras with license activation (license type: 1/2/4ch)

<sup>7</sup> NS-8060 can support up to 16 cameras with license activation (license type: 1/2/4/6/8/10ch)

<sup>8</sup> The width/length of 4 megapixels is limited to 2560x1600. The local display won't work if either one side is over the limit.

<sup>9</sup> The width/length of 2 megapixels is limited to 1920x1080. The local display won't work if either one side is over the limit. 2 / 6

Device Dimension (HxWxD)	262 x 137 x 300 mm			88.5 x 438 x 442 mm	
Device Weight (Without Drive)	2.5 kg (5.51lbs)			9 kg (19.84lbs)	
Temperature (Operating with HDD)	0°C-40°C				
Humidity (Operating)	5%-95%				
Supported IP Camera Brands: 85 brands in v1.1.2 <sup>10</sup>	ACTi	ADT	Airlive	Alphatech	American Dynamics
	Arecont	AMTK	ARM	Asoni	AXIS
	BASLER	Bolide	BOSCH	Brickcom	Bullwark
	Centrix	CISCO	CNB	COP	CORUM
	Dahua	Digital Watchdog	D-Link	D-LinkCN	DYNACOLOR
	Eneo	Ernitec	Etrovision	Everfocus	Fine
	Forenix	GE	Grandstream	Grundig	Guardeon
	Guardliner	HIKVision	Histream	Honeywell	i-Mege
	IQinVision	Jetstor	JVC	LevelOne	LG
	Lilin	Linksys	Lumenera	MegaIP	Messoa
	Milesight	Mobotix	NetworkCamera	NTIC	On Electronics
	Onvif	Panasonic	Pelco	PIXORD	Planet
	Probe	Rover	Saerim	Samsung	SANTEC
	SANYO	Shany	Sony	StarDot	Sunell
	Telview	Techson	Tiandy	TOSHIBA	TRUEN
	UDP	Videosec	Vitek	Vision Hi-Tech	Vista
	VIVOTEK	Yudor	Zavio	3M	3Svision
Compression Format <sup>11</sup>	MPEG4, M-JPEG, H.264, MxPEG (remote client only)				
Recording Type	Emergency record, continuous record, record by schedule, event triggered record, digital input triggered record				
Live View Control	Live view, preset/go, PTZ, remote I/O, snapshot, digital PTZ				
Remote Live View Control	Live view, preset/go, PTZ, remote I/O, snapshot, multi-view, digital PTZ, advanced E-Map, bandwidth monitoring				
Audio & Video Recording	Synchronized audio and video recording				
POS <sup>12</sup>	Live view, record, playback, and search for every transaction (web only)				
Auto Backup	Automatically backup the recorded video of the date before to FTP server				
Intelligent Search via Web/Remote	General motion, missing object, foreign object, lose focus, camera occlusion				
Remote Live View Connection	Live view maximum 64 connections per server at the same time <sup>13</sup>				
Supported Languages: 19	English, Croatian, Czech, Deutsch, Finnish, French, Hebrew, Italian, Japanese, Korean, Polish, Portuguese (Brazil), Russian, Simplified Chinese, Traditional Chinese, Spanish, Swedish, Thai, Turkish				
Remote Client System Minimum Requirement					
Model	NS-1040	NS-1080	NS-8060		
OS	Windows XP (32-bit) / Win7 (32 and 64-bit) / Win8 (32 and 64-bit)				
CPU	Intel Core 2 Duo, 2.6GHz				
RAM	1GB				
LAN Transmission Speed	10/100/1000 Mbps (RJ45)				
UI	1. Web browser: Internet Explorer 8, 9, 10 2. NUUO client application program				

<sup>10</sup> The data is updated for DP 2.16.

<sup>11</sup> Depends on IP cameras.

<sup>12</sup> POS device configuration and search function are available in web only.

<sup>13</sup> Please refer to performance report for more details.



## 3. NUUO iPhone, iPad, Android mobile live viewer<sup>14</sup>

### Technical Details

#### • System, Setting, Management and Integration

- ❑ **Server-Client Architecture:** Centralizes all video data transaction only via NVRsolo to local operators and remote clients. With this centralized structure, total camera loading remains at a stable level, thus ensuring good recording quality even when reaching maximum number of remote client access.
- ❑ **Open Platform:** Support 2151 IP camera models and video servers (encoders) from 85 brands of major network camera manufacturers.<sup>15</sup>
- ❑ **One-Click Setup:** NVRsolo can automatically search and add IP cameras on the same subnet (camera should support UPnP protocol or should be implemented its brand's search tool<sup>16</sup>). For those unsearchable cameras, user can manually insert it. The auto detection function will help the user to find the brand and model of the camera after specifying its IP address.
- ❑ **Storage Optimization:** NVRsolo supports H.264 compression format which helps increasing the storage efficiency to nearly 600% higher than MJPEG and 150% higher than MPEG4.
- ❑ **Friendly GUI Recording Scheduler:** Graphical user interface to setup recording schedule featuring unique day mode and week mode.
- ❑ **Event & Action:** 4 camera events including motion detection (if supported by camera), connection lost and camera input; 1 input event from remote I/O box; 5 system events and daily system report by E-mail; 5 instant alarm responses supporting output, Email, E-map popup on web/remote, push notification on mobile and NUUO CMS alarm system.
- ❑ **RAID Level Selection:** NS-1040/NS-1080 supports RAID 0 and 1 for maximum capacity or data protection at the HDD level. To use RAID 1, you must insert two 2.5 inch HDDs.
- ❑ **Point of Sale (POS):** POS transactions received through NUUO POS box or Ethernet (TPC/IP client). POS text overlay on live view video and recordings. All recorded POS transactions are searchable on web/remote playback system.
- ❑ **I/O Event Control:** With the integration of camera I/O and NUUO I/O Box, system can start recording when input triggered, or trigger output as an event happened.
- ❑ **Various Authorities of Different Kinds of Users:** Web Viewer logins to NVRsolo via 4 different user groups: administrator, power user, user, and guest. Each user group has its own distinctive privilege in system configuration, live view camera and playback records.
- ❑ **Synchronization with NTP Server:** Synchronize time weekly/monthly to keep the accuracy of recording time.
- ❑ **Log System:** Hardware log keeps track of system operation; NVR log for camera status and user access; NVR event Log for special events; Export and Backup Log for exporting video or video backup action.
- ❑ **User Friendly:** Provide users with hints on local interface and HELP tab on the webpage for quick start tips and troubleshooting.
- ❑ **Auto Power-on:** The system shall be able to power-on automatically and keep recording after incident power outage.

<sup>14</sup> Please check the supported camera spec list on website. Besides, to use this feature, you have to enable 2<sup>nd</sup> stream function on setting page first.

<sup>15</sup> The data is updated for DP 2.16.

<sup>16</sup> Support camera search tools of ACTi, Arecont, and Sony.

## • Local Operation

- ☐ **Multiple Live View Channel:** Up to 8 channels on NS-1040/NS-1080 and up to 16 channels on NS-8060. The maximum resolution display per channels is up to 4 megapixels in H.264 codec, and 2 megapixels in MPEG4 codec.<sup>17</sup>
- ☐ **Multiple Playback Channel:** Up to 8 channels on NS-1040/NS-1080 and up to 16 channels on NS-8060.
- ☐ **Monitor Resolution:** 1024x768, 1280x720, 1280x1024, 1920x1080.
- ☐ **Emergency Recording:** Click the Emergency Recording button on Live View to active all channels always recording instantly.
- ☐ **Instant Playback:** Play the last few minutes of live videos instantly to investigate recent events.

## • Remote Client Operation

- ☐ **Multiple Live View Channel:** Up to 64 channels of remote connections per unit. Under full loading configuration, 16-channel connections are recommended.<sup>18</sup> Remote Live Viewer client supports 64 channels from multiple servers, and could display up to 128 channels with multiple monitors. In addition, Remote Live Viewer client can access and display live video from any NUUO Mainconsole family servers simultaneously.
- ☐ **Multiple Playback Channel:** In web playback client/NUUO Playback System, up to 8 channels on NS-1040/NS-1080 and up to 16 channels on NS-8060.
- ☐ **Monitor Resolution:** 800x600, 1024x768, 1200x900, 1280x1024, 1366x768, 1440x900, 1600x1200, 1680x1050, 1920x1080, 1920x1200.
- ☐ **Multi-View:** NVRsolo can duplicate the same live view video onto multiple channels and digitally zoom in to see the details of different spots on cloned channels without losing the original live view video or using extra camera licenses.
- ☐ **E-Map:** Show device indicator on map for easy finding and tracking device location. Furthermore, pop up map to point out the device when an event occurred.
- ☐ **Stream Profile:** Live display multiple camera streams with lower bit rate, while still recording at highest possible quality.
- ☐ **Multiple Mobile Clients:** Support mobile live viewer for iPhone, iPad, and Android.<sup>19</sup>

## • Playback, Search, Export and Secure Data

- ☐ **Post-Recording Processing (remote):** Intelligent search, digital PTZ and video enhancement tool.
- ☐ **Intelligent Search (remote):** Search recorded video for 5 events including general motion, foreign object, missing object, loss focus and camera occlusion.
- ☐ **Video Enhancement (remote):** Fine tune the image's visibility, sharpen, brightness, contrast or even grey scale.
- ☐ **Evidence Export:** Snapshot and print video image in BMP/ JPEG; backup video in DAT; save video in ASF/AVI.

<sup>17</sup> The width/length of 2 megapixels is limited to 1920x1080, while 4 megapixels is 2560x1600. The local display won't work if either one side is over the limit.

<sup>18</sup> Please refer to performance report for more details.

<sup>19</sup> Please check the supported camera spec list on website. Besides, to use this feature, you have to enable 2<sup>nd</sup> stream function on web setting page first.

The action exporting video or video backup will be recorded in NVRsolo's log system.

- ☐ **Alarm Notification:** Notify users on camera and system event by sound, digital output, push notification, E-mail and NUUO CMS alert.
- ☐ **Auto Backup:** Automatically backup the recorded video of previous dates to a designated FTP server.
- ☐ **Manual Backup:** Manually backup or delete the recordings from any NVRsolo.
- ☐ **Watermark:** Protect original recordings from alternation with NUUO watermark verification tool.

## • Extended Service

- ☐ **NUUO Central Management System (CMS):** Ultimate central monitoring solution for grand scale projects and projects with multiple sites. Fully compatible with all NUUO Mainconsole family servers.

## • External Device

- ☐ **POS Box (from serial port to Ethernet):** NUUO Point of Sales system works on NVRsolo by overlaying the transaction text from cash register or ATM machines onto live video and recordings. All recorded POS transactions are searchable on web/remote playback system.
- ☐ **Remote I/O Box:** I/O signals of NUUO I/O Box are converted to Ethernet through converter, which enables NVRsolo to do more sophisticated application, such as starting recording when input triggered, triggering output as an event happened, and much more.
- ☐ **Panorama 360° PTZ:** Several modes are supported on web/remote live view and playback system. Generic dewarp: Original mode, Rectilinear mode, Quad mode and Dual-view panorama mode. ImmerVision<sup>20</sup>: Original mode, PTZ mode, Quad mode and Perimeter mode. Vivotek: Original mode, Rectilinear mode, Full-view panorama mode, and Dual-view panorama mode.
- ☐ **APC UPS:** Continues to feed the NVRsolo power in an event of power outage.
- ☐ **Joystick:** Joystick support on PTZ cameras and software enabled digital PTZ function are both available in web/remote live view. Preset points and patrol functions are also available on many camera models.

<sup>20</sup> Please refer to ImmerVision's website for qualified cameras.