



# FE9182-H



# FE9382-EHV

## Fisheye Network Camera



H.265 · 5MP · 360° Surround View · WDR Pro · 360° 20M IR ·  
Smart Stream II · IP66 · IK10 · EN50155

VIVOTEK's FE9182-H and FE9382-EHV are two unique H.265 fisheye fixed dome network cameras, both featuring a detailed 5-Megapixel CMOS sensor that produces superb image clarity. By employing H.265 compression technology and VIVOTEK's Smart Stream II technology, these cameras can reduce both bandwidth and storage consumption by up to 80%\* while retaining the highest standard of image quality.


Equipped with a fisheye lens for 180° panoramic view (wall mount) or 360° surround view (ceiling/floor mount) with zero blind spots, the cameras are able to provide coverage of wide, open areas, such as airports, shopping malls, retail stores, offices and more. Further equipped with IR illuminators up to 20 meters, these cameras will maintain surveillance coverage both day and night.

The FE9182-H and the FE9382-EHV are both equipped with a removable IR-cut filter and WDR Pro technology, enabling the cameras to maintain optimal image quality and unparalleled visibility in high contrast lighting environments. Moreover, the FE9382-EHV is designed with full EN50155 compliance, vandal-proof IK10-rated, and weather-proof IP66-rated housing, ensuring that the camera can withstand shock, vibration, humidity, dust, and temperature fluctuations, and maintain stable and reliable video capture during vehicle movement.

\* Depending on scene being monitored.

## Key Features

- H.265 Compression Technology
- 5-Megapixel CMOS Sensor
- 30 fps @ 1920x1920
- 1.47 mm Fisheye Lens for 180° Panoramic View and 360° Surround View
- Removable IR-cut Filter for Day & Night Function
- Built-in IR illuminators, effective up to 20 meters
- WDR Pro for Unparalleled Visibility in High Contrast Environments
- Smart Stream II to Optimize Bandwidth Efficiency
- EN50155 Compliance for Professional Mobile Surveillance (FE9382-EHV)
- Vandal-proof IK10-rated and Weather-proof IP66-rated Housing (FE9382-EHV)
- ePTZ for Data Efficiency
- Built-in 802.3af Compliant PoE
- Support Client Side Dewarping
- Pixel Counter for Image Clarity Measurement
- Defog

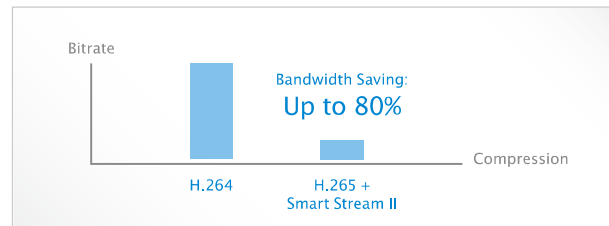

Combining both H.265 and VIVOTEK Smart Stream II, the camera can reduce bandwidth and storage consumption up to 80% more than cameras using H.264.



IR with High Uniformity

IR with Low Uniformity

# Technical Specifications

Model	FE9182-H: 360° 20 m IR, WDR Pro FE9382-EHV: 360° 20 m IR, WDR Pro, IP66, IK10, EN50155, Extreme Weather
-------	--

## System Information

CPU	Multimedia SoC (System-on-Chip)
Flash	128MB
RAM	512MB

## Camera Features

Image Sensor	1/1.8" Progressive CMOS in 3096x2094
Maximum Resolution	1920x1920
Lens Type	Fixed-focal
Focal Length	f = 1.47 mm
Aperture	F2.2
Field of View	180° (Horizontal) 180° (Vertical) 180° (Diagonal)
Shutter Time	1/5 sec. to 1/32,000 sec.
WDR Technology	WDR Pro
Day/Night	Removable IR-cut filter for day & night function
Minimum Illumination	0.18 Lux @ F2.2 (Color) 0.001 Lux @ F2.2 (B/W)
Pan/Tilt/Zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in)
IR Illuminators	Built-in IR illuminators, effective up to 20 meters 850nm IR LED*6
On-board Storage	Slot type: MicroSD/SDHC/SDXC card slot Seamless Recording

## Video

Compression	H.265, H.264, MJPEG
Maximum Frame Rate	H.265/H.264: 30 fps @ 1920x1920 MJPEG: 12 fps @ 1920x1920
Maximum Streams	4 simultaneous streams
S/N Ratio	42.3dB
Dynamic Range	100dB
Video Streaming	Adjustable resolution, quality and bitrate; Smart Stream II
Image Settings	Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks; Scheduled profile settings, 3D noise reduction; Adjustable image size, quality and bit rate, defog; Pixel counter

## Audio

Audio Capability	Two-way audio
Compression	G.711, G.726

Interface	Built-in microphone External microphone input External line output
Effective Range	5 meters

## Network

Users	Live viewing for up to 10 clients
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS, NTCP
Interface	10 Base-T/100 BaseTX Ethernet (RJ-45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P/ETL standard.
ONVIF	Supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>

## Intelligent Video

Video Motion Detection	Five-window video motion detection
------------------------	------------------------------------

## Alarm and Event

Alarm Triggers	Motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
Alarm Events	Event notification using digital output, HTTP, SMTP, FTP, NAS server and SD Card File upload via HTTP, SMTP, FTP, NAS server and SD Card

## General

Connectors	RJ-45 cable connector for Network/PoE connection Audio input*1 Audio output*1 DC 12V power input*1 Digital input*1 Digital output*1
LED Indicator	System power and status indicator
Power Input	DC 12V IEEE 802.3at PoE Class 4
Power Consumption	FE9182-H: Max. 12.95 W FE9382-EHV: Max. 20 W
Dimensions	FE9182-H: Ø 160 x 39 mm FE9382-EHV: Ø 160 x 51 mm
Weight	FE9182-H: 568 g FE9382-EHV: 762 g
Casing	FE9382-EHV: Weather-proof IP66-rated housing Vandal-proof IK10-rated metal housing
Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL, EN50155 (FE9382-EHV)

## Technical Specifications

Operating Temperature	FE9182-H: Starting Temperature: 0°C ~ 50°C (32°F ~ 122°F) Working Temperature: -10°C ~ 50°C (14°F ~ 122°F) FE9382-EHV: Starting Temperature: -25°C ~ 55°C (-13°F ~ 131°F) Working Temperature: -40°C ~ 55°C (-40°F ~ 131°F)	Others	Quick installation guide, warranty card, alignment sticker, desiccant bag, screw driver, screws pack, I/O cable, mounting bracket
Humidity	90%	<b>Dimensions</b>	
Warranty	36 months		
<b>System Requirements</b>			
Operating System	Microsoft Windows 8/7/Vista/XP/2000		
Web Browser	Mozilla Firefox 7~43 (Streaming only) Internet Explorer 7/8/9/10/11		
Other Players	VLC: 1.1.11 or above Quicktime: 7 or above		
<b>Included Accessories</b>			

## Compatible Accessories

Mounting Kits				
AM-114 Pendant head for outdoor model (FE9382-EHV)	AM-118 Pendant head for indoor model (FE9182-H)	AM-116/AM-117 Pendant pipe (20cm/40cm)	AM-51C Adapting plate for indoor model (FE9182-H)	AM-520 Mounting adapter