

HD-TVI-D3 Dome HD-TVI Camera

with Infrared LEDs and a wide angle 3.6mm Fixed Lens.



The HD-TVI-D3 is an indoor infrared dome security camera that supports full 1080P HD. The housing on this camera is for indoor use only. This camera has a fixed 3.6mm lens for a wide angle of view (about 90 degrees), and a 1/2.9" Sony CMOS sensor, which supports **full HD - 1080p video resolution** in both Color (day) & B&W (night) modes.

The 2 "giant" infrared LEDs allows the HD-TVI-D3 to maintain a clear image, and continue to record in near, or complete darkness. **Smart IR technology** allows the infrared LEDs to adjust their intensity based on the proximity of an object to prevent the image from "whiting out". This HD-TVI dome camera is powered by a **12V-DC** adapter.

HD-TVI-D3 Features

Fixed 3.6mm Lens for wide horizontal angle of view


1080p resolutions in Color & night vision mode - 2 Megapixel Resolution

Wide Dynamic Range (WDR) Enhancement, for use in challenging lighting conditions

Normal, low light, and zero light infrared surveillance

On-Screen Display (OSD) menu, allows for specific camera configurations

Website Link: For more information, click here: [HD-TVI-D3 HD-TVI dome camera](#)

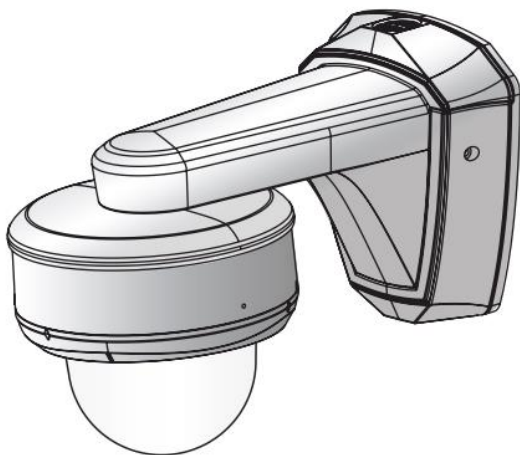

Want to mount the **HD-TVI-D3** using a wall bracket? We have an **optional wall mount bracket available.**





CCTV Camera Pros

Video Surveillance Systems for Home, Business & Government

HD-TVI-D3 Features

Sensor	1/2.9" SONY CMOS
Effective Pixels	1984 (H) x 1225 (V) pixels = 2.43 megapixel (NTSC)
Total Pixels	2000 (H) x 1241 (V) pixels = 2.48 megapixel (NTSC)
Video Output	TVI (1080P) / CVBS: 1.0Vp-p (75ohm)
Scanning System	PROGRESSIVE
Housing	Indoor Only
HD Resolution	1080p in color (day) and B&W (night)
Minimum Illumination	0 LUX with Infrared
Electronic Shutter Speed	AUTO / MANUAL (1/30sec ~ 1/60,000sec)
S/N (Y Signal)	More than 52 dB (AGC Off)
O.S.D. (On Screen Display)	On Screen Display menu accessed via mini joystick on HD-TVI-D3 camera
Backlight Compensation (BLC)	Selectable: OFF / WDR / BLC / HLM
Wide Dynamic Range (D-WDR)	Selectable: OFF / ON (0- 8)
SENSUP / Low Light Intensity	Selectable: OFF / X2 / X3 / X4 / x5 / x6 / x7 / x8
Digital Noise Reduction (3D DNR)	Selectable: OFF / LOW / MIDDLE / HIGH (improves low illumination)
Day & Night	Selectable: Auto (Day <--> Night time change) / Ext / COLOR / B&W
Smart Motion Detection	Selectable: (0 ~ 20 STEP)
Sharpness	Adjustable : (0 ~ 10 STEP)
Available Languages	ENG, CHN1, CHN2, JPN, KOR
Privacy	Selectable: OFF / ON (4 Zone)
White Balance	Selectable: AUTO / AUTO EXT / PRESET / MANUAL
Power	12V-DC
Operating Temp / Humidity	Operating Temp: -10°C ~ +50°C / 30% ~ 80% RH
Storage Temp / Humidity	Storage Temp: -20°C ~ +60°C / 20% ~ 90% RH / Humidity: 20 ~ 90% RH
Dimensions (mm / inches)	Height (to top of Dome): 3.63" (92.3mm); Width : 4.72" (120mm).
Weight	Weight : approximately 9.9 Ounces / 282 grams
CCTV Camera Pros Website Link	For more information HD-TVI-D3 HD-TVI dome camera

DOME CAMERA DIMENSIONS (mm)

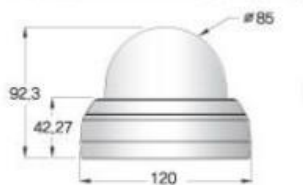

WALL MOUNT BRACKET (OPTION)



Looking for a HD surveillance DVR for this camera to record to?

CCTV Camera Pros highly recommends our latest iDVR-PRO surveillance DVRs which support full 1080p recording at 30 frames per second. Please [visit this page for more information](#).