


# 8 Channel HD Surveillance System DVR (AHD, TVI, CCTV Cameras)



## Features

- Supports HD-TVI,AHD , Analog cameras
- Full channel @1080P resolution real time view/record on all channels
- HDMI/VGA output at up to 1920×1080P
- H.264 video compression
- All camera synchronous playback
- Search by Thumbnail Images (Day, Hour, Minute Scale)
- Windows, Macintosh, iOS, Android Apps

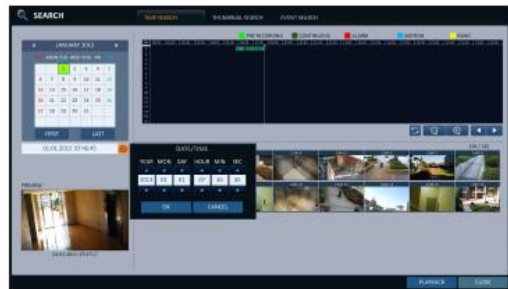

## Rear Panel

1. Video in(BNC)
2. Spot Out 1 (1~8ch multi view)  
Spot Out 2 ( 1ch view)
3. VGA
4. HDMI
5. eSATA
6. USB
7. LAN -system reserved
8. Network(WAN)
9. DC12V input
10. Audio input
11. Audio out
12. Alarm in 1~4
13. Relay out 1~2, RS485, RS232

MODEL		iDVR-PRO8M	
<b>Video / Audio input</b>			
Video Compression	H.264		
Video Input	8ch BNC (Analog, TVI, AHD Cameras)		
Audio Compression	G.711u		
Audio	4 In(RCA), 1 out(RCA), CODEC:G.711		
<b>Video output</b>			
HDMI Output	1 X HDMI (1920X1080)-Main/Sub Monitor		
VGA Output	1 X VGA (1920 X 1080)-Main/Sub Monitor		
Frame Rate	30 fps per channel @1920x1080 Res.		
SPOT OUT 1	1~8 ch Multi View BNC spot out		
SPOT OUT 2	Single ch View BNC sopt out		
<b>Playback</b>			
Playback Speed	Variable Playback (up to 64x)		
Instant playback	Instant playback mode for quick review		
Search Mode	Calendar, Event, Thumbnail Search		
D Zoom	Digital Zoom on Live & Playback		
Rec. Resolution	1080P/720P/WD1/D1/2CIF/CIF @ 30fps		
<b>Hard Disk</b>			
Capacity	Up to 6TB capacity for each HDD		
HDD	4 HDD (or 2HDD+1DVD)		
<b>External Interface</b>			
Network Interface	1 RJ45 10M/100M		
USB Interface	2 @ Front, 1 @ Rear		
Serial Interface	RS-485 for PTZ & Keyboard		
Alarm in	4 ch		
Alarm out	2ch Relay		
<b>General</b>			
Power Supply	Output : DC12V,7.5A , Input:100~240V AC, 50~60Hz		
Operate Temperature	32°F~104°F		
Dimension	14 x 15 x 2.5 inch		
Weight	12 lb		
<b>CMS/Web/Smart Phone</b>			
CMS	Windows & Mac Viewer Software		
Web	IE, Chrome, Firefox		
Mobile Apps	iPhone, iPad, Android		
DDNS	Free DDNS service(Preregistered)		

