

Subject:

DVR Specification


Part No.:

99.264.8610.001

Rev.:

1

SCB-5000 Series

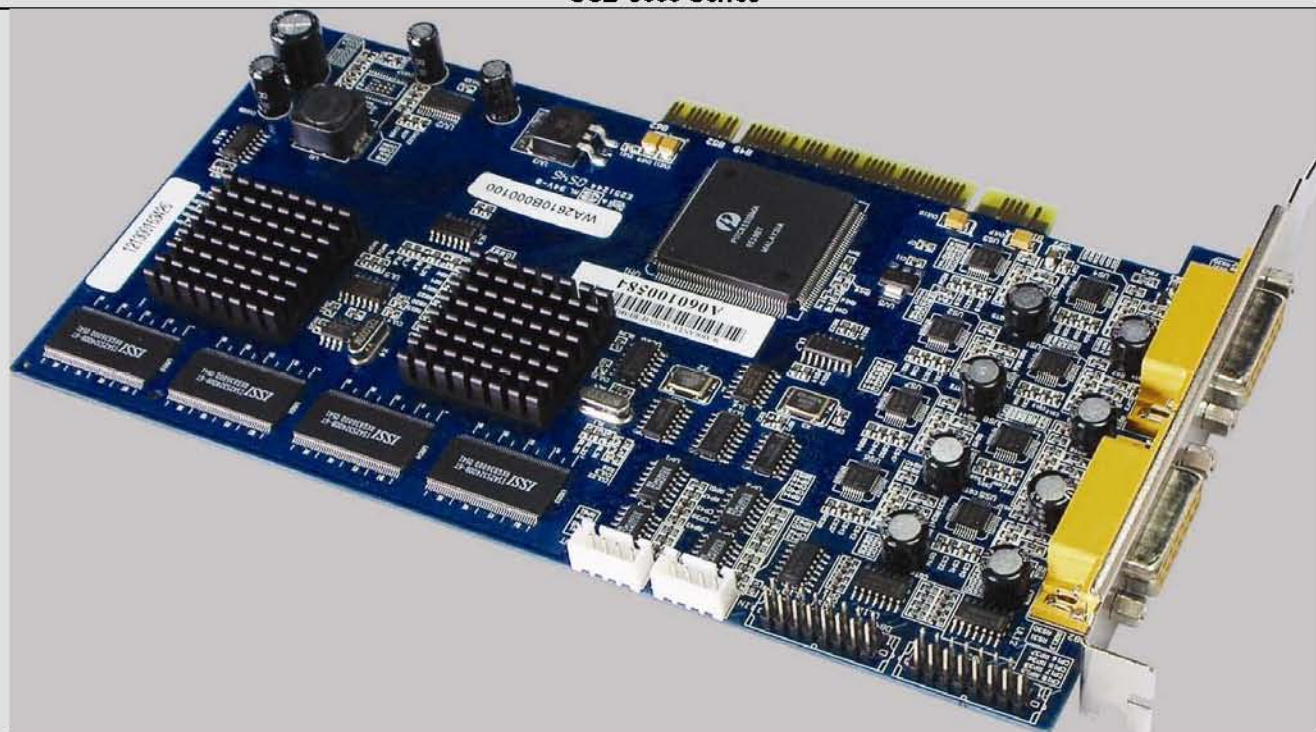

Specifications

Model	SCB-5004	SCB-5008	SCB-5016
Video Input	4 Cameras	8 Cameras	16 Cameras
Audio Input	4 Channel	8 Channel	16 Channel
Maximum Cards	4 Cards	4 Cards	4 Cards
Display Rate	120 fps (NTSC), 100 fps (PAL)	240 fps (NTSC), 200 fps (PAL)	480 fps (NTSC), 400 fps (PAL)
Recording Rate	120 fps (NTSC), 100 fps (PAL)	240 fps (NTSC), 200 fps (PAL)	480 fps (NTSC), 400 fps (PAL)
Video Resolution	NTSC: 176x120; 352x240; 528x320; 704x480* PAL: 176x144; 352x288; 528x384; 704x576*		
Compression Format	Hardware Compression H.264		
Available I/O Card	N/A		
Available I/O Box	Supporting		
Hardware Watchdog	N/A		
Dimension	154 (W) x 95 (H) mm	201 (W) x 109 (H) mm	265 (W) x 125 (H) mm
Software Version	NUUO H.264 Hybrid system v3.0.0		

System Minimum Requirements

OS Supported	Windows 2000 / Windows XP / Windows 2003
CPU	Pentium 4 – 2.8 GHz
RAM	512 MB
HDD	80 GB
Mother-board	Intel 945 or 965 chip, Intel Chipset and ASUS motherboard recommended
Display	ATI Radeon 9200, nVIDIA GeForce FX-5200, Intel 945 / 965, or above (ATI recommended)

Support Language

Chinese (Simplified)	Chinese (Traditional)	Czech	Danish
English	Farsi	Finnish	French
German	Greek	Hebrew	Hungarian
Italian	Japanese	Korean	Portuguese(Brazil)
Portuguese(Portugal)	Russian	Slovak	Spanish
Thai	Turkey		

* Support SCB-5004R to record 2ch @ D1 resolution, SCB-5008R to record 4ch @ D1 resolution, SCB-5016R to record 8ch @ D1 resolution at always record mode (need to close Remote Live Viewer Server)

Distributed by CCTV Camera Pros
please visit www.cctvcamerapros.com for more information