





CCTV Camera Pros

Video Surveillance Systems for Home, Business & Government

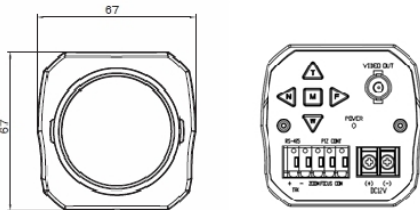

Introduction

The PTZ-9210Z41 is world's first 1/3" CCD Zoom Block. With it's new Sony SS3 Chipset and Super HAD CCDII, it displays pictures at a sharpness and sensitivity (0.03 lux @DSS Off) never before possible with 1/4" Zoom Blocks.

Special Features

- World's First 1/3 inch CCD Zoom Block
- 550 TV Lines
- 0.1 Lux Color / 0.03 Lux B&W @ DSS Off / 0.001 Lux @ DSS Max
- Fast Zoom Tracking Speed : 2.8 sec (Wide to Tele)
- Mechanical Day & Night (Photo Cell Sensor)
- Dwell Time for D/N change : 0~10 sec
- 18X Optical / 10X Digital Zoom
- Privacy Zones, Motion Detection, Preset
- RS 485 via Pelco-D/P protocol

Specification

Image Device	Sony 1/3" Super HAD CCD II
Effective Pixels	NTSC / 768(H) x 494(V)
Electronic Shutter	NTSC / 1/60 ~ 1/100,000sec Auto
Scanning System	2:1 Interlace
Horizontal Resolution	More than 550 TV Lines
Lens	Optical Zoom(F1.6(W),F2.8(T) f=4.7-84.6mm)
S/N Ratio	More than 48dB (AGC Off / DSS Off)
AGC	LOW / MID / HIGH / SUPER
Sensitivity	0.1 Lux Color / 0.03 Lux B&W @ 30IRE, DSS OFF, 0.001@DSS Max
BLC	OFF / ON (Level adjustment, Area selection)
White Balance	ATW / INDOOR / OUTDOOR / PUSH AUTO / MANUAL (R Gain, B Gain) / AWB
Mechanical Day & Night	COLOR / B/W / AUTO / EXT
Digital Slow Shutter	Off / On (2~128) Field
Dwell Time	0 ~ 10 sec
Zoom	1x ~ 18x Optical / 1x ~ 10x Digital
Zoom Tracking Speed	2.8 sec (Wide to Tele)
Focus	AUTO / MANUAL / PUSH
Zoom/Focus Preset	512 internal / 128 external
Camera Control	RS-485 via Pelco-D/P, A/D key remote controller
Sync System	Internal
Video Output	Composite 1 [Vp-p] 75(Ω) unbalanced
Power Input	DC 12V (±10%) / Max 300mA
Operating Temperature	-10°C ~ +50°C
Storage Humidity	30% ~ 90% RH
Dimensions	67mm X 67mm X 124mm
Functions	15 Privacy zones, Freeze, Image Reverse, 5 Motion Detection
OSD	English / Spanish / Russian / German

Specifications may change without prior notice or liability