


RG59U Siamese Cable for CCTV Applications

75 Ohm Siamese Cable, Series 59 , Standard shield jacket

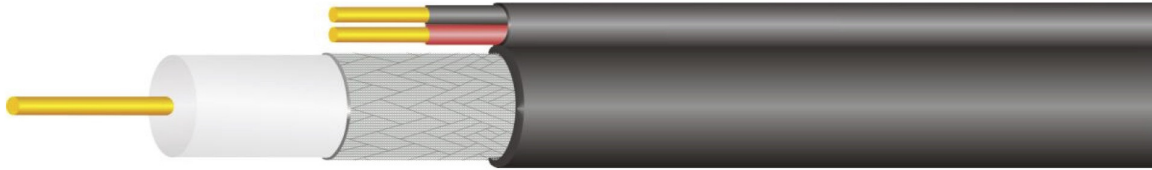

Construction	Material	Diameter (mm)
Inner Conductor	Copper	0.81
Dielectric	Foam PE	3.70
Braid	36AWG CCA wire Braid	95%
Jacket	PVC	6.1 ±0.2
Siamese Inner Conductor	Cu	4*0.38
Siamese Jacket	Cca	3*0.38
	PE	1.8±0.1

Electrical Characteristics

Impedance	75±5.0 Ohms
Return Loss	
5-1000 MHz	≤20dB
1000-3000 MHz	≤15dB

Attenuation(20°C/(68 °F))(Max Value:+/-10%)

Frequency (MHz)	Norminal (db/100ft)
5	0.96
55	1.98
100	2.62
211	3.80
250	4.16
270	4.35
300	4.58
330	4.82
350	4.97
400	5.36
450	5.72
500	6.06
550	6.38
600	6.71
750	7.57
870	8.02
1000	8.86

CCTV Camera Pros

7142 N Seacrest Blvd.
Lantana, FL 33462