

HD-BL8 1080P HD Bullet Security Camera

with IP66 Weatherproof Rating, Standard-Analog, AHD, TVI, & CVI Support



The HD-BL8 is a 4in1 HD bullet security camera that supports **Analog, AHD, CVI, and TVI HD formats**, which are switchable with ease using the detachable joystick. The **3.5~16mm varifocal lens** of the HD-BL8 provides the user with the ability to adjust the angle of view to perfectly fit their application.

The **IP66 rated housing** protects the vital components of the camera from harsh weather, dust, humidity, and acts of vandalism. The tri-axis mounting bracket allows the installer to mount the camera to a wall or ceiling and adjust the angle of view in any direction.

For more information about the HD-BL8, please visit <https://www.cctvcamerapro.com/HD-Bullet-Security-Camera-p/hd-bl8.htm>

HD-BL8 Highlights

- **Uses RG59 Coaxial Cable** (The same as Analog systems)
- Zero video loss / delay on DVR, as the camera is directly wired
- High definition **1080P** (1920 x 1080) resolution
- Analog, **AHD, CVI, and TVI Supported**
- **OSD** (On Screen Display) for convenient setting adjustment
- **Tri-Axis mounting bracket** for wall or ceiling mount
- Metal body construction, **IP66** weatherproof rating




CCTV Camera Pros

Video Surveillance Systems for Home, Business & Government

HD-BL8 Specifications

Image Sensor	1/3" Panasonic CMOS Image Sensor
Digital Noise Reduction	3D-DNR/HD, 2D-DNR/CVBS
Image Resolution	NTSC: 30FPS in 1080P (1920 x 1080) / PAL: 25FPS in 1080P (1920 x 1080)
Effective Pixels	1984(H) x 1225(V); 2MP
TV System	PAL / NTSC
Electronic Shutter	AUTO / FLK, 1/25(1/30) ~ 1/50,000 Sec
Sync System	Internal
Usable Illumination	0.08 Lux in Color Mode / 0.008 Lux in B/W Mode, 0.0008 Lux with Sens-up
S/N Ratio	≥52dB
Scanning System	Progressive Scan
Video Output Mode	AHD, CVI, TVI (1080P); CVBS (960H) 1000TVL
Lens	3.5~16mm Varifocal Lens
Infrared LEDs	No
Day / Night	Auto / Color / B/W / EXT
OSD Menu Language	English / Chinese
White Balance	ATW / AWC / Indoor / Outdoor / Manual / AWB
Sens-Up	OFF / X2~X30
Automatic Gain Control	OFF / 0~15
OSD Support	Yes, with detachable controller
Weatherproof Housing	IP66
Mounting Bracket	Tri-Axis
D-WDR	Yes
Backlight Compensation	Yes
Operation Temperature	-10°C ~ 50°C / 14°F ~ 122°F
Storage Temperature	-10°C ~ 50°C / 14°F ~ 122°F
Power Source	12V-DC ±30%, 350mA
Dimensions	104.64mm(4.12") x 28.44mm(1.12") x 44.45mm(1.75")
Weight	272 Grams

Video Mode Selector

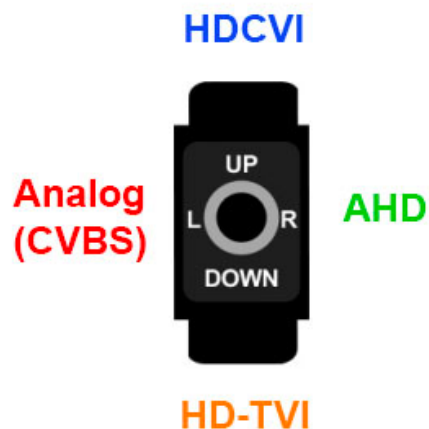

For information relating to video surveillance, please contact us, via email at info@cctvcamerapros.net, or by phone at 561-433-8488 / 888-849-2288; or visit our Website: www.cctvcamerapros.com