


GV-IO 12-Out Card V3

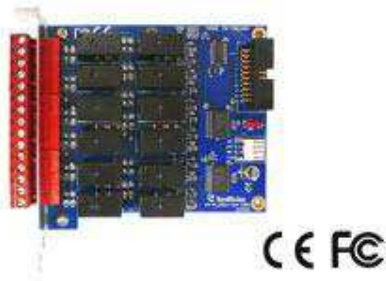

With 12 relay outputs, the GV-IO 12-Out Card is designed to work with GV-NET/IO Card to provide an interface for your external devices such as alarms and gates.

Specifications			
Output	Relay Output		12
	Relay Status		Normal Open
	Relay	USB Connection	USB Connection
	Capacitance	RS-232 Connection	RS-232 Connection
DC In			DC 5V, 1A
Operating Temperature			0~50°C / 32~122°F, 5%~95% (non-condensing)
Compatible Card Models			GV-600 V3, GV-650 V3, GV-800 V3, GV-900 V1.11, GV-1000 V1.21, GV-1120, GV-1240, GV-1480, GV-2004, GV-2008
Dimensions (W x H)			120 x 99 (mm) / 4.72 x3.90 (in)
Installation Guide			GV-IO 12-Out Card V3

Note: All specifications are subject to change without notice.