


GV-800B Video Capture Card

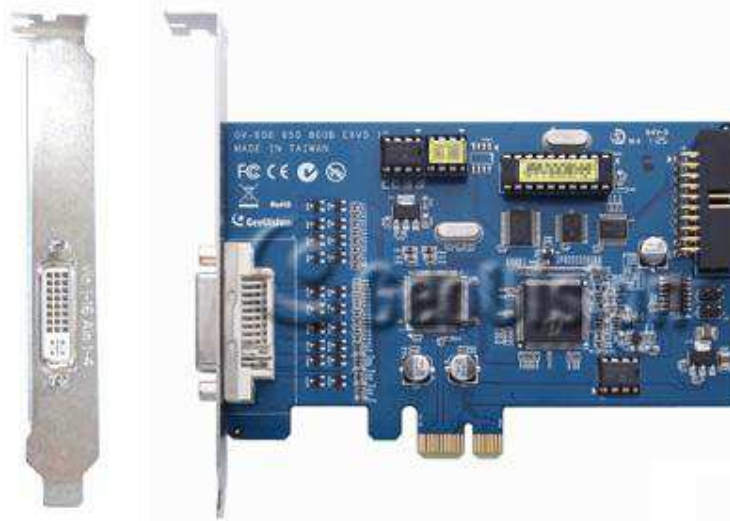

GV-800B Card provides up to 16 video channels and 4 audio channels, recording up to 120 / 100 fps (NTSC / PAL) in total with H.264 software compression.

Specifications

| | | | GV-800B | GV-800B X 2 |
|--------------------------|------|--|-------------------------------------|---|
| Interface | | | PCI-E (x1) | PCI-E (x1) x 2, PCI x 1 + PCI-E (x1) x 1 |
| Input Type | | | DVI | |
| Video Input | | | 4, 8, 16 Cams | 8, 12, 16, 20, 24, 32 Cams |
| Audio Input | | | 4 Channels | 8 Channels |
| Recording Rate | CIF | NTSC | 4-port: 120 fps 16-port: 120 fps | 4+4 port: 240 fps 16+16 port: 240 fps |
| | | PAL | 4-port: 100 fps 16-port: 100 fps | 4+4 port: 200 fps 16+16 port: 200 fps |
| | D1 | NTSC | 4-port: 120 fps 16-port: 60 fps | 4+4 port: 240 fps 16+16 port: 120 fps |
| | | PAL | 4-port: 100 fps 16-port: 50 fps | 4+4 port: 200 fps 16+16 port: 100 fps |
| Display Rate | CIF | NTSC | 4-port: 120 fps 16-port: 120 fps | 4+4 port: 240 fps 16+16 port: 240 fps |
| | | PAL | 4-port: 100 fps 16-port: 100 fps | 4+4 port: 200 fps 16+16 port: 200 fps |
| | D1 | NTSC | 4-port: 120 fps 16-port: 60 fps | 4+4 port: 240 fps 16+16 port: 120 fps |
| | | PAL | 4-port: 100 fps 16-port: 50 fps | 4+4 port: 200 fps 16+16 port: 100 fps |
| Video Resolution | NTSC | 704x480, 704x480 De-interlace, 640x480, 640x480 De-interlace, 352x240, 320x240 | | |
| | PAL | 704x576, 704x576 De-interlace, 640x480, 640x480 De-interlace, 352x288, 320x240 | | |
| Video Compression Format | | | Geo MPEG4, Geo H264 | |
| Audio Format | | | 16 kHz / 16-bit, 32 kHz / 16-bit) | |
| GV-NET/IO Card Support | | | Yes | |
| Dimensions (W x H) | | PCI-E | 120 x 82 mm / 4.7 x 3.2 in | |
| Installation Guide | | | GV-800B | |

Note:

1. GV-800B is currently not compatible with VIA series and ATI series chipset motherboards.
2. 8-port has the same recording rate and display rate as 16-port.
3. Specifications are subject to change without notice.

Minimum System Requirements For One Card, CIF Resolution

| | | |
|---------------|---|---|
| OS Supported | 32-bit | Windows 7 / 8 / 8.1 / 10 / Server 2008 |
| | 64-bit | Windows 7 / 8 / 8.1 / 10 / Server 2008 R2 / Server 2012 |
| CPU | Pentium 4, 3.0 GHz with Hyper-Threading | |
| RAM | 2 x 1 GB Dual Channels | |
| HDD | 80 GB | |
| Graphics Card | AGP or PCI-Express, 800 x 600 (1280 x 1024 recommended), 32-bit color | |
| DirectX | 9.0c | |

Minimum System Requirements For Two Cards, CIF Resolution

| | | |
|---------------|---|---|
| OS Supported | 32-bit | Windows 7 / 8 / 8.1 / 10 / Server 2008 |
| | 64-bit | Windows 7 / 8 / 8.1 / 10 / Server 2008 R2 / Server 2012 |
| CPU | Pentium 4, 3.0 GHz Dual Core | |
| RAM | 2 x 1 GB Dual Channels | |
| HDD | 160 GB | |
| Graphics Card | AGP or PCI-Express, 800 x 600 (1280 x 1024 recommended), 32-bit color | |
| DirectX | 9.0c | |

Packing List

1. GV-800B Card x 1
2. 1-16 Cams with 4-Port Audio DVI-Type Cable x 1 / 1-8 Cams with 4-Port Audio DVI-Type Cable x 1 / 1-4 Cams with 4-Port Audio DVI-Type Cable x 1
3. Hardware Watchdog Jumper Wire x 1
4. Software DVD x 1

Note: The **1-16 Cams with 4-Port Audio DVI-Type** cable is supplied with GV-800B card with 16 video inputs, the **1-8 Cams with 4-Port Audio DVI-Type** cable is supplied with GV-800B card with 8 video inputs, while the **1-4 Cams with 4-Port Audio DVI-Type** cable is supplied with GV-800B card with 4 video inputs.

Accessories

4 cam video cable



8 cam video cable



16 cam video cable

