



FD8173-H

Fixed Dome Network Camera

3MP · 20M IR · Smart Stream · Smart Focus System · PIR · Smart IR · WDR Pro · 3DNR

VIVOTEK's FD8173-H network camera features a 3-Megapixel WDR CMOS sensor to cope with challenging lighting conditions. The WDR Pro feature allows the camera to capture both the dark and bright areas of an image and combine the differences to generate a highly realistic representation of the original scene. This feature enables the camera to provide video quality very close to the capabilities of the human eye. The FD8173-H can be deployed widely in high contrast environments such as lobby entrances, hotel alleys and more. The P-iris lens controls the iris with extreme precision; with its built-in stepper motor, it maintains the iris opening at an optimal level at all times, resulting in superior image clarity and depth of field.

Key Features

- 3-Megapixel CMOS Sensor
- 20 fps @ 2048x1536
- Motorized, P-iris Lens
- Smart IR Technology to Avoid Overexposure
- Built-in IR Illuminators, Effective up to 20 Meters
- PIR
- Smart Stream
- 3D Noise Reduction
- Built-in MicroSD/SDHC/SDXC Card Slot for On-board Storage
- WDR Pro for Unparalleled Visibility in Extremely Bright and Dark Environments
- Smart Focus System for Remote and Precise Focus Adjustment
- Two-way Audio



With WDR Pro


Without WDR Pro



Retail



Office



Hotel




Bank

Technical Specifications

Model	FD8173-H	Interface	10Base-T/100 BaseTX Ethernet (RJ-45)
System Information		ONVIF	Supported, specification available at www.onvif.org
CPU	Multimedia SoC (System-on-Chip)	Intelligent Video	
Flash	128 MB	Video Motion Detection	Triple-window video motion detection
RAM	256 MB	Alarm and Event	
Camera Features		Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection
Image Sensor	1/3 " Progressive CMOS	Alarm Events	Event notification using HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
Maximum Resolution	2048x1536	General	
Lens Type	Vari-focal, remote focus	Smart Focus System	Remote focus
Focal Length	f = 2.8 ~ 12 mm	Connectors	RJ-45 for Network/PoE connection Audio input Audio output AC 24V power input DC 12V power input Digital input*1 Digital output*1
Aperture	F1.8 ~ F2.85	LED Indicator	System power and status indicator
Auto-iris	P-iris	Power Input	DC 12V AC 24V IEEE 802.3af PoE Class 3
Field of View	29.7° ~ 82.6° (Horizontal) 22.4° ~ 61.9° (Vertical) 37.6° ~ 108.7° (Diagonal)	Power Consumption	DC 12V: Max.11 W AC 24V: Max.12.5 W PoE: Max. 11 W
Shutter Time	1/5 sec. to 1/32,000 sec.	Dimensions	Ø: 157 mm x 109 mm
WDR Technology	WDR Pro	Weight	Net: 758g
Day/Night	Removable IR-cut filter for day & night function Smart IR Technology to Avoid Overexposure	Safety Certifications	CE, LVD, FCC Class B, VCCI, C-Tick, UL
Minimum Illumination	0.33 Lux @ F1.8 (Color) 0.001 Lux @ F1.8 (B/W)	Operating Temperature	Starting Temperature: -10°C ~ 50°C (14°F~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F~ 122°F)
Pan/tilt/zoom Functionalities	ePTZ: 48x digital zoom (4x on IE plug-in, 12x built-in)	Warranty	36 months
IR Illuminators	Built-in IR illuminators, effective up to 20 meters IR LED*4 with Smart IR Technology	System Requirements	
On-board Storage	MicroSD/SDHC/SDXC card slot	Operating System	Microsoft Windows 7/Vista/XP/2000
Video		Web Browser	Mozilla Firefox 7~10 (Streaming only) Internet Explorer 7/8/9/10
Compression	H.264, MJPEG	Other Players	VLC: 1.1.11 or above QuickTime: 7 or above
Maximum Frame Rate	H.264: 20 fps @ 2048x1536 30 fps @ 1920x1080 MJPEG: 20 fps @ 2048x1536 30 fps @ 1920x1080	Included Accessories	
Maximum Streams	3 simultaneous streams	CD	User's manual, quick installation guide, Installation Wizard 2, free ST7501 32-channel VMS
S/N Ratio	Above 62 dB	Others	Quick installation guide, warranty card, alignment sticker, desiccant bag, waterproof connector
Dynamic Range	100 dB	Dimensions	
Video Streaming	Adjustable resolution, quality and bitrate		
Image Settings	Adjustable image size, quality and bit rate Time stamp, text overlay, flip & mirror Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, Scheduled profile settings 3D Noise Reduction, Smart Stream Seamless recording, new text on video, SD recording 1HR		
Audio			
Audio Capability	Audio input/output (full duplex)		
Compression	AAC, G.711, G.726		
Interface	Internal microphone input External audio output		
Network			
Users	Live viewing for up to 10 clients		
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X		

Dimensions

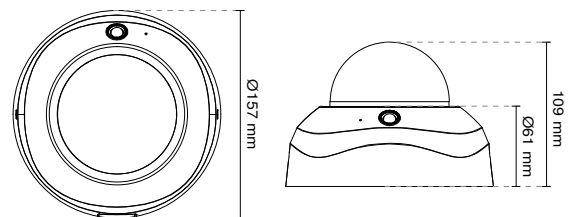

Compatible Accessories

Mounting Kits



AM-215
L Shape Bracket



AM-712
Conduit Box

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,

VIVOTEK USA
2050 Ringwood Avenue,

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,

Ver. 4

