



Fixed Dome Network Camera FD8355HV/55EHV



1.3MP • WDR Pro II • 30M IR • Smart IR •
3DNR • Smart Focus • SNV • IP66 • IK10

VIVOTEK FD8355HV/55EHV are professional outdoor network dome cameras offering up to 60 fps @ 1.3-Megapixel resolution with superb image quality.

Featuring the new improved Wide Dynamic Range Technology WDR Pro II, it provides extreme visibility in extremely dark & light environments with 4 shutter capture methods. Combined with 3D Noise Reduction Technology, which enables the FD8355HV/55EHV to capture clear, polished video under low-light conditions and reduce bandwidth from sensor noise, users can identify an increased level of image detail in extremely bright as well as dark environments.




Additionally, as a professional day/night camera, FD8355HV/55EHV adopt Smart IR technology which prevents overexposure and provides noise reduction to adjust IR lighting intensity instantaneously based on changes in lighting in the ambient environment.

To provide top-notch image quality, FD8355HV/55EHV also come with a P-iris lens, which controls the iris with extreme precision with its built-in stepper motor. By using software controls, the lens maintains the iris opening at an optimal level at all times, resulting in superior sharpness and depth of field as well as image quality. Furthermore, for installers, properly adjusting the focus of a megapixel network camera can be difficult due to the level of image detail. Thus, FD8355HV/55EHV are also designed with VIVOTEK's Smart Focus System to make installation and adjustment easier by using remote focus and zoom adjustment.

The camera's IP66-rated housing is designed to help the camera body withstand rain and dust and high pressure water jets from any direction while the IK10 vandalproof rating provides protection against the vandalism and impact. Additionally, the wide temperature range further enhances the FD8355EHV's performance and reliability in extremely cold and hot weather.

Features


- 1.3-Megapixel CMOS Sensor
- 30 fps @ 1280x1024;
60 fps @ 1280x1024 (One-stream mode only)
- Motorized, P-iris Lens
- Removable IR-cut Filter for Day & Night Function
- Built-in IR Illuminators, Effective up to 30 Meters
- Smart IR Technology to Avoid Overexposure
- 3D Noise Reduction for Low-light Conditions
- WDR Pro II to Provide Extreme Visibility in Extremely Bright and Dark Environments
- Smart Focus System for Remote and Precise Focus Adjustment
- Two-way Audio
- Weather-proof IP66-rated and Vandal-proof IK10-rated Housing
- Supreme Night Visibility

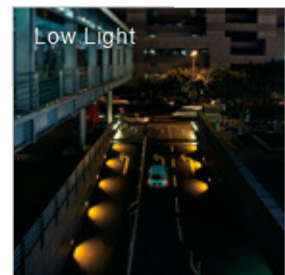

Technical Specifications

Model	FD8355HV/55EHV	Intelligent Video	
System Information		Video Motion Detection	Triple-window video motion detection
CPU	Multimedia SoC (System-on-Chip)	Alarm and Event	
Flash	256MB	Alarm Triggers	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection
RAM	384MB	Alarm Events	Event notification using digital output, HTTP, SMTP, FTP and NAS server File upload via HTTP, SMTP, FTP and NAS server
Camera Features		General	
Image Sensor	1/3" Progressive CMOS	Smart Focus System	Remote focus
Maximum Resolution	1280x1024(1.3MP)	Connectors	RJ-45 for Network/PoE connection Audio input/output AV output AC 24V power input DC 12V power input Digital input*1 Digital output*1
Lens Type	Vari-focal, Remote Focus	LED Indicator	System power and status indicator
Focal Length	f = 3 ~ 10 mm	Power Input	DC12V/AC24V IEEE 802.3af PoE
Aperture	F1.3 ~ F2.5	Power Consumption	FD8355HV: DC Max. 8 W AC Max. 8.8 W PoE Max. 10.6 W FD8355EHV: DC Max. 25.2 W (Heater on), 8 W (Heater off) AC Max. 30.3 W (Heater on), 8.8 W (Heater off) PoE Max. 10.6 W
Auto-iris	P-iris/DC-Iris(Reserved)	Dimensions	Ø: 173mm x 115 mm
Field of View	30° ~ 95° (Horizontal) 24° ~ 75° (Vertical) 39° ~ 123° (Diagonal)	Weight	Net: 1215 g
Shutter Time	1/5 sec. to 1/10000 sec.	Casing	Weather-proof IP66-rated housing Vandal-proof IK10-rated housing
WDR Technology	WDR Pro II	Safety Certifications	CE, LVD, FCC Class A, VCCI, C-Tick, UL
Day/Night	Removable IR-cut filter for day & night function Smart IR Technology to avoid overexposure (WDR on)	Operating Temperature	FD8355HV: Starting Temperature: -10°C ~ 50°C (14°F ~ 122°F) Working Temperature: -20°C ~ 50°C (-4°F ~ 122°F) FD8355EHV: Starting Temperature: -40°C ~ 50°C (-40°F ~ 122°F) (PoE: -10°C ~ 50°C) Working Temperature: -50°C ~ 50°C (-58°F ~ 122°F) (PoE: -20°C ~ 50°C)
Minimum Illumination	0.05 Lux @ F1.3 (Color) 0.001 Lux @ F1.3 (B/W)	Warranty	24 months
Pan/tilt/zoom	ePTZ:	System Requirements	
Functionalities	48x digital zoom (4x on IE plug-in, 12x built in)	Operating System	Microsoft Windows 7/Vista/XP/2000
IR Illuminators	Built-in IR illuminators, effective up to 30 meters IR LED*4, with Smart IR Technology	Web Browser	Mozilla Firefox 7~10 (streaming only) Internet Explorer 7/8/9/10
On-board Storage	MicroSD/SDHC/SDXC card slot	Other Players	VLC: 1.1.11 or above Quicktime: 7 or above
Video		Included Accessories	
Compression	H.264, MJPEG	CD	User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software
Maximum Frame Rate	30 fps @ 1280x1024 60 fps @ 1280x1024 (One-stream mode only) In both compression modes	Others	Quick installation guide, warranty card, mounting plate, alignment sticker, L-type hex key wrench, desiccant bag, screws, hex nut, double-sided tape, AV cable, waterproof connector & bushing, DC connector
Maximum Streams	2 simultaneous streams		
S/N Ratio	64dB		
Dynamic Range	Up to 140dB		
Video Streaming	Adjustable resolution, quality and bitrate		
Image Settings	Time stamp, text overlay, flip & mirror configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, scheduled profile settings, 3D Noise Reduction, seamless recording		
Audio			
Audio Capability	Two-way audio (full duplex)		
Compression	AAC, G.711, G.726		
Interface	External microphone input Audio output		
Network			
Users	Live viewing for up to 10 clients		
Protocols	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP/RTP/RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP		
Interface	10Base-T/100 BaseTX Ethernet (RJ-45)		
ONVIF	Supported, specification available at www.onvif.org		

Dimensions

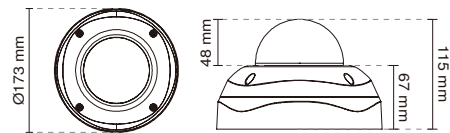

Compatible Accessories

Mounting Kits



AM-214
L shape bracket



AM-518
Outdoor Dome Adaptor

PoE Kits



POE-IJ-1748NDN
PoE injector, 802.3af compliant



AW-FED-0500
4-port Unmanaged PoE Switch

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

Distributed by:



VIVOTEK INC.
6F, No.192, Lien-Cheng Rd., Chung-Ho,

VIVOTEK USA
2050 Ringwood Avenue,

VIVOTEK Europe
Randstad 22-133, 1316BW Almere,

Ver 1.5

