

# IP816A-LPC

## LPC Solution Network Camera



2MP • P-Iris • WDR Pro • SNV • 3DNR • Remote Back Focus • EIS • 60 fps • Snapshot Focus • Corridor View • License Plate Capture

VIVOTEK's IP816A-LPC (Parking) and IP816A-LPC (Street) are a series of professional box network cameras offering perfect solutions for License Plate Capture with a unique headlight filter design and specialized firmware for traffic monitoring.

Featuring dedicated LPC firmware and mutually compatible lens options, the IP816A-LPC (Parking) and the IP816A-LPC (Street) are perfect for parking related and street based applications respectively. With a suitable selection of external IR LEDs, both cameras will be ideal for 24/7 license plate capture and will provide high-detail polished images for reliable license plate recognition.

Equipped with a P-Iris lens for extreme precision images, a headlight filter design which blocks distracting lights, and Full HD sensor enabling viewing resolution of 1920x1080 at a smooth 30 fps, the IP816A-LPC (Parking) and the IP816A-LPC (Street) are capable of capturing high quality and high resolution video in any conditions. With up to 2 Megapixel with WDR Pro, 3DNR and SNV technology, no matter whether in high contrast or in low light environments, these cameras are high-tech workhorses which will ensure license plate capture and traffic monitoring of the highest precision.

In order to help properly adjust the focus of these high resolution cameras, the IP816A-LPC (Parking) and the IP816A-LPC (Street) are equipped with VIVOTEK's RBF (Remote Back Focus) System, allowing installers to adjust focus even more accurately in complicated or sensitive installation environments. Meanwhile, value-added features like EIS and Snapshot Focus ensure that the IP816A-LPC (Parking) and the IP816A-LPC (Street) perform as the perfect LPR solutions by empowering installers to adjust camera positions and focus with extreme precision.

## Key Features

- 2-Megapixel CMOS Sensor
- 30 fps @ 1920x1080
- 60 fps @ 1920x1080 (one-stream mode only)
- P-Iris Lens
- Headlight Filter to Block Visible Light
- 3D Noise Reduction for Low-light Conditions
- WDR Pro (100 dB) to Provide Extreme Visibility in High Light Contrast Scenes
- SNV (Supreme Night Visibility)
- RBF System to Assist for Precise Focus Adjustment
- EIS (Electronic Image Stabilization) to Control Image Stability
- Two-way Audio
- Snapshot Focus
- Video Rotation for Corridor View
- Lens Profile for Lens Selection
- Snapshot Focus



Without WDR Pro

With WDR Pro



Train Station



Traffic Monitoring



Ordinary Camera

With SNV Camera



Tunnel Monitoring




Parking Lot

## Technical Specifications

<b>Model</b>	IP816A-LPC (Parking) IP816A-LPC (Street)
<b>System Information</b>	
<b>CPU</b>	Multimedia SoC (System-on-Chip)
<b>Flash</b>	256MB
<b>RAM</b>	384MB
<b>Camera Features</b>	
<b>Image Sensor</b>	1/1.9" Progressive CMOS
<b>Maximum Resolution</b>	1920x1080 (2MP)
<b>Lens Type</b>	Vari-focal
<b>Focal Length</b>	IP816A-LPC (Parking): f = 4 ~ 18 mm IP816A-LPC (Street): f = 12 ~ 40 mm
<b>Aperture</b>	IP816A-LPC (Parking): F1.4 ~ F13 IP816A-LPC (Street): F2.36 ~ F2.44
<b>Auto-iris</b>	Piris (DC-iris reserved)
<b>Field of View</b>	IP816A-LPC (Parking): 28° ~ 106° (Horizontal) 16° ~ 60° (Vertical) 33° ~ 130° (Diagonal) IP816A-LPC (Street): 10.2° ~ 30° (Horizontal) 8° ~ 22° (Vertical) 12° ~ 38° (Diagonal)
<b>Shutter Time</b>	IP816A-LPC (Parking): 1/400 to 1/10,000 sec. IP816A-LPC (Street): 1/800 to 1/10,000 sec.
<b>Max. Shutter Time</b>	1/5 to 1/10,000 sec.
<b>WDR Technology</b>	WDR Pro
<b>Day/Night</b>	Removable IR-cut filter for day & night function
<b>Minimum Illumination</b>	Illumination Threshold: 300 Lux @ IR On 600 Lux @ IR Off
<b>Pan/tilt/zoom Functionalities</b>	ePTZ: 48x digital zoom (4x on IEplug-in, 12x built in)
<b>On-board Storage</b>	SD/SDHC/SDXC card slot
<b>Video</b>	
<b>Compression</b>	H.264 & M.JPEG
<b>Maximum Frame Rate</b>	30 fps @ 1920 x1080 60 fps @ 1920 x1080 (In one-stream mode only) (In both compression mode)
<b>Maximum Streams</b>	2 simultaneous streams
<b>S/N Ratio</b>	50.8 dB
<b>Dynamic Range</b>	Up to 100 dB
<b>Video Streaming</b>	Adjustable resolution, quality and bitrate
<b>Image Settings</b>	Time stamp, text overlay, flip & mirror; Configurable brightness, contrast, saturation, sharpness, white balance, exposure control, gain, backlight compensation, privacy masks, scheduled profile settings; 3D noise reduction, BIS, video rotation, snapshot focus
<b>Audio</b>	
<b>Audio Capability</b>	Two-way Audio (full duplex)
<b>Compression</b>	AAC, G.711, G.726
<b>Interface</b>	External microphone input Audio output
<b>Network</b>	
<b>Users</b>	Live viewing for up to 10 clients
<b>Protocols</b>	IPv4, IPv6, TCP/IP, HTTP, HTTPS, UPnP, RTSP, RTP, RTCP, IGMP, SMTP, FTP, DHCP, NTP, DNS, DDNS, PPPoE, CoS, QoS, SNMP, 802.1X, UDP, ICMP, ARP, SSL, TLS
<b>Interface</b>	10 Base-T/100 Base-TX Ethernet (RJ45) *It is highly recommended to use standard CAT5e & CAT6 cables which are compliant with the 3P ETL standard.

<b>ONVIF</b>	Supported, specification available at <a href="http://www.onvif.org">www.onvif.org</a>
<b>Intelligent Video</b>	
<b>Video Motion Detection</b>	Triple-window video motion detection
<b>Alarm and Event</b>	
<b>Alarm Triggers</b>	Video motion detection, manual trigger, digital input, periodical trigger, system boot, recording notification, camera tampering detection, audio detection
<b>Alarm Events</b>	Event notification using digital output, HTTP, SMTP, FTP and NAS server, SD Card File upload via HTTP, SMTP, FTP, NAS server and SD card
<b>General</b>	
<b>Smart Focus System</b>	RBF (Remote Back Focus)
<b>Connectors</b>	RJ45 for Network/PoE connection Audio input/output BNC Video output AC 24V power input DC 12V power input Digital input*3 Digital output*1 RS485
<b>LED Indicator</b>	System power and status indicator
<b>Power Input</b>	DC 12V/AC 24V IEEE 802.3af PoE
<b>Power Consumption</b>	Max. 9.2 W (DC 12V) Max. 15.4 W (AC 24V) Max. 12.2 W (PoE)
<b>Dimensions</b>	230.2 (D) x 70 (W) x 63.5 (H) mm
<b>Weight</b>	632 g
<b>Safety Certifications</b>	CE, LVD, FCC Class B, VCCI, C-Tick, UL
<b>Operating Temperature</b>	Starting Temperature: 0°C ~ 60°C (32°F ~ 122°F) Working Temperature: -10°C ~ 60°C (14°F ~ 122°F)
<b>Warranty</b>	36 months
<b>System Requirements</b>	
<b>Operating System</b>	Microsoft Windows 8/7/Vista/XP/2000
<b>Web Browser</b>	Mozilla Firefox 7~10 (streaming only) Internet Explorer 7/8/9/10/11
<b>Other Players</b>	VLC: 1.1.11 or above Quicktime: 7 or above
<b>Included Accessories</b>	
<b>CD</b>	User's manual, quick installation guide, Installation Wizard 2, ST7501 32-channel recording software
<b>Others</b>	Quick installation guide, warranty card, lens, camera stand, screw pack

## Dimensions

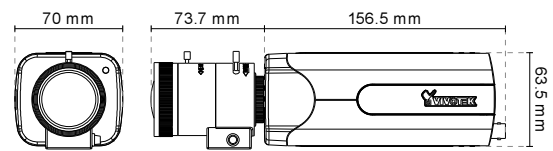

## Compatible Accessories

### Enclosures



**AE-236 (Coming Soon)**  
Camera Enclosure with Heater (AC 24V)



**AE-237**  
Camera Enclosure (AC 24V)



**AE-241**  
IR UPoE Camera Enclosure



**AE-242**  
IR UPoE Camera Enclosure with Heater

### Lens



**AL-244**  
4 ~ 18mm, F1.4, Piris



**AL-245**  
12 ~ 40mm, F1.8, Piris

### IR Illuminators



**AI-104-010/025/035**  
-40 ~ 50°C, 24W/IR LED, distance 100M/50M/25M, IP66, IK10 (12~24VDC or 24VAC in)

All specifications are subject to change without notice. Copyright © VIVOTEK INC. All rights reserved.

