

Comcast TC8305C Port Forwarding Setup Instructions for NUUO Main Console



In the picture above the address bar has <http://www.google.com> in it. Just replace all of that with the internal IP address of your Technicolor TC8305C router. By default the IP address should be set to 10.0.0.1.


A screenshot of the Xfinity router login page. At the top left is the "xfinity" logo. Below it is the heading "Login". The main content area contains a white box with the text "Please login to manage your router." followed by two input fields: "Username:" and "Password:". A "LOGIN" button is positioned to the right of the password field. At the bottom of the page, there is a blue banner with the text "Xfinity.com customerCentral User Guide" and a large, semi-transparent watermark that reads "PortForward.com".

You should see a box prompting you for your username and password. Enter your username and password now.

The Default Username is: **admin**

The Default Password is: **password**

Now that you are logged in to your Technicolor TC8305C router you should see the following:

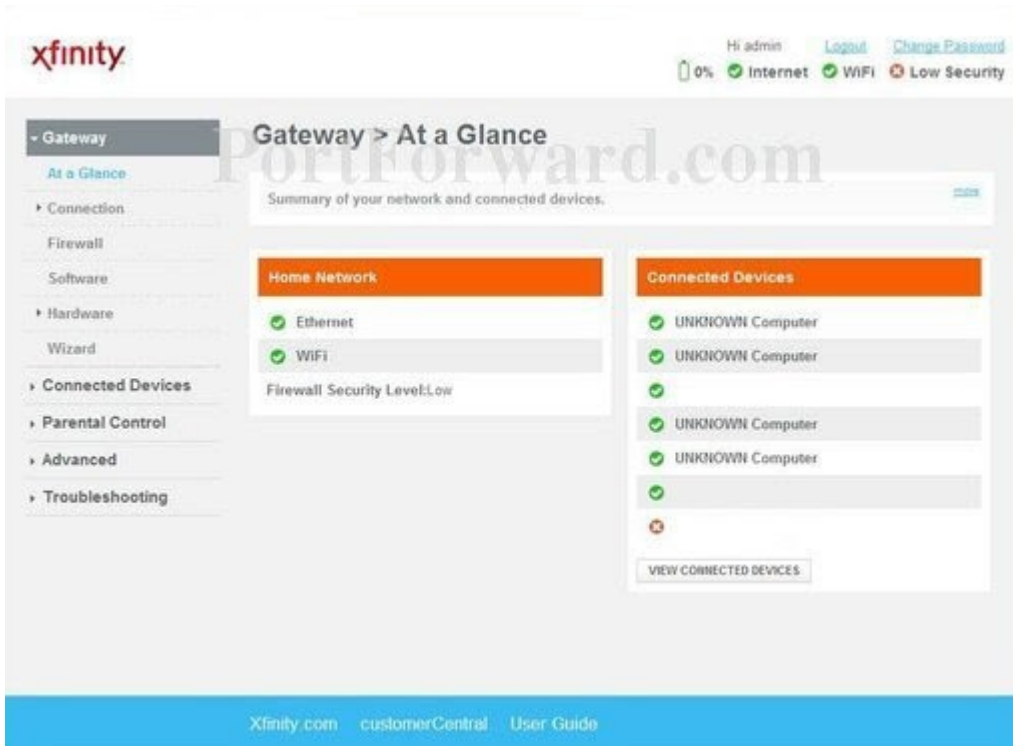

Click the **Advanced** link near the left of the page.

You should now see a new menu. In this new menu, click **Port Forwarding**.



Click the **Add Service** button near the center of the page.

The screenshot shows the Xfinity Advanced Port Forwarding 'Add Service' form. The page title is 'Advanced > Port Forwarding > Add Service'. On the left is a navigation menu with 'Advanced' selected, containing sub-items like 'Port Forwarding', 'Port Triggering', 'DMZ', 'Dynamic DNS', 'Device Discovery', and 'Troubleshooting'. The main form area includes a text area for email notifications, a blue 'Add Service' header, and several input fields: 'Services Name' (dropdown menu), 'Other Service' (text box), 'Service Type' (dropdown menu), 'Server IP Address' (text box), 'Start Port' (text box), and 'End Port' (text box). At the bottom are 'SAVE' and 'CANCEL' buttons. A watermark 'PortForward.com' is visible across the form. The top right of the page shows user status 'Hi admin', 'Logout', 'Change Password', and system status '0% Internet WiFi Low Security'.

Now fill in as follows..

Other Service: This can be anything this is only for reference.

Service Type : TCP

Server IP Address: IP address of PC

Start Port: 80

End Port: 80

Now click **Save**.

Repeat this step for port 5150 and 5160 as well.