

Comcast TC8305C Port Forwarding Setup Instructions for iDVR-PRO 960H



In the picture above the address bar has <http://www.google.com> in it. Just replace all of that with the internal IP address of your Technicolor TC8305C router. By default the IP address should be set to 10.0.0.1.


A screenshot of the Xfinity router login page. At the top left is the "xfinity" logo. Below it is the heading "Login". A white box contains the text "Please login to manage your router." followed by two input fields: "Username:" and "Password:". A "LOGIN" button is positioned to the right of the password field. At the bottom of the page, there is a blue banner with the text "Xfinity.com customerCentral User Guide" and a large, semi-transparent watermark "PortForward.com" in the background.

You should see a box prompting you for your username and password. Enter your username and password now.

The Default Username is: **admin**

The Default Password is: **password**

Now that you are logged in to your Technicolor TC8305C router you should see the following:

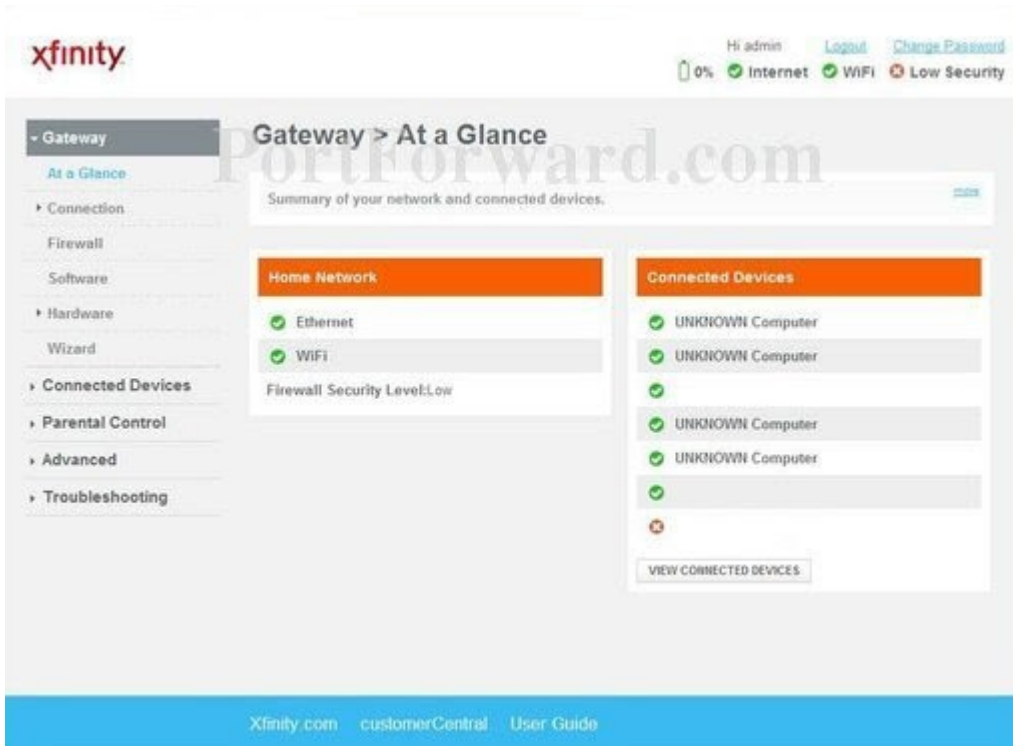

Click the **Advanced** link near the left of the page.

You should now see a new menu. In this new menu, click **Port Forwarding**.



Click the **Add Service** button near the center of the page.

The screenshot shows the Xfinity Advanced Port Forwarding 'Add Service' configuration page. The page has a sidebar on the left with navigation options: Gateway, Connected Devices, Parental Control, Advanced (selected), Port Forwarding, Port Triggering, DMZ, Dynamic DNS, Device Discovery, and Troubleshooting. The main content area is titled 'Advanced > Port Forwarding > Add Service'. At the top right, there is a user status 'Hi admin' with links for 'Logout' and 'Change Password', and system status indicators for '0%' battery, 'Internet', 'WiFi', and 'Low Security'. Below the title is a text area for email notifications. The 'Add Service' form includes a dropdown for 'Services Name' (set to 'Other'), an 'Other Service' text field, a dropdown for 'Service Type' (set to 'UDP'), a 'Server IP Address' field with three sub-inputs, 'Start Port' and 'End Port' text fields, and 'SAVE' and 'CANCEL' buttons. A watermark 'PortForward.com' is visible across the form.

Now fill in as follows..

Other Service: This can be anything this is only for reference.

Service Type : TCP

Server IP Address: IP address of DVR

Start Port: 8080

End Port: 8080

Now click **Save**.

Repeat this step for port 5554 as well.