

Comcast TC8305C Port Forwarding Setup Instructions for Vivotek Camera



In the picture above the address bar has <http://www.google.com/> in it. Just replace all of that with the internal IP address of your Technicolor TC8305C router. By default the IP address should be set to 10.0.0.1.


A screenshot of the Xfinity router login page. At the top left is the "xfinity" logo. Below it is the heading "Login". A white box contains the text "Please login to manage your router." followed by two input fields: "Username:" and "Password:". A "LOGIN" button is located to the right of the password field. At the bottom of the page, there is a blue banner with the text "Xfinity.com customerCentral User Guide" and a large watermark "PortForward.com" in the background.

You should see a box prompting you for your username and password. Enter your username and password now.

The Default Username is: **admin**

The Default Password is: **password**

Now that you are logged in to your Technicolor TC8305C router you should see the following:

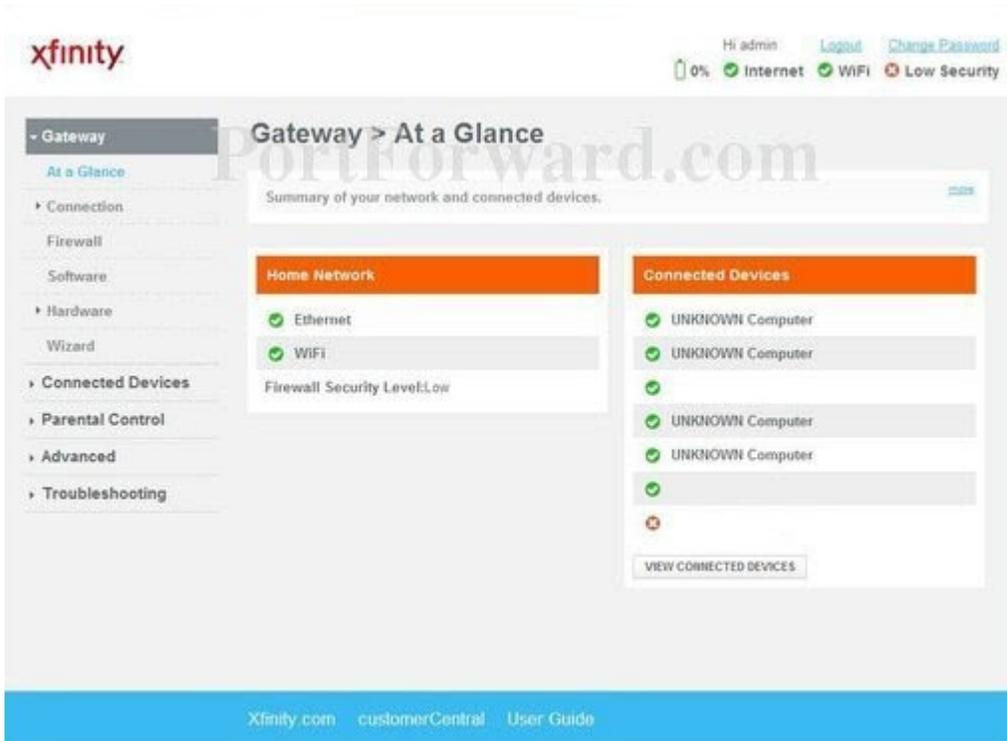

Click the **Advanced** link near the left of the page.

You should now see a new menu. In this new menu, click **Port Forwarding**.



Click the **Add Service** button near the center of the page.

The screenshot shows the Xfinity Advanced Port Forwarding Add Service form. The page title is "Advanced > Port Forwarding > Add Service". The form includes a text area for email notifications, a "Services Name" dropdown menu set to "Other", an "Other Service" text field, a "Service Type" dropdown menu set to "UDP", a "Server IP Address" field with three sub-fields, a "Start Port" field, and an "End Port" field. There are "SAVE" and "CANCEL" buttons at the bottom. A watermark "PortForward.com" is visible across the form. The footer contains "Xfinity.com", "customerCentral", and "User Guide".

Now fill in as follows..

Other Service: This can be anything this is only for reference.

Service Type : TCP

Server IP Address: IP address of Vivotek IP Camera

Start Port: 80

End Port: 80

Now click **Save**.