

Comcast TC8305C Port Forwarding Setup Instructions for Geovision DVR



In the picture above the address bar has <http://www.google.com> in it. Just replace all of that with the internal IP address of your Technicolor TC8305C router. By default the IP address should be set to 10.0.0.1.




You should see a box prompting you for your username and password. Enter your username and password now.

The Default Username is: **admin**

The Default Password is: **password**

Now that you are logged in to your Technicolor TC8305C router you should see the following:

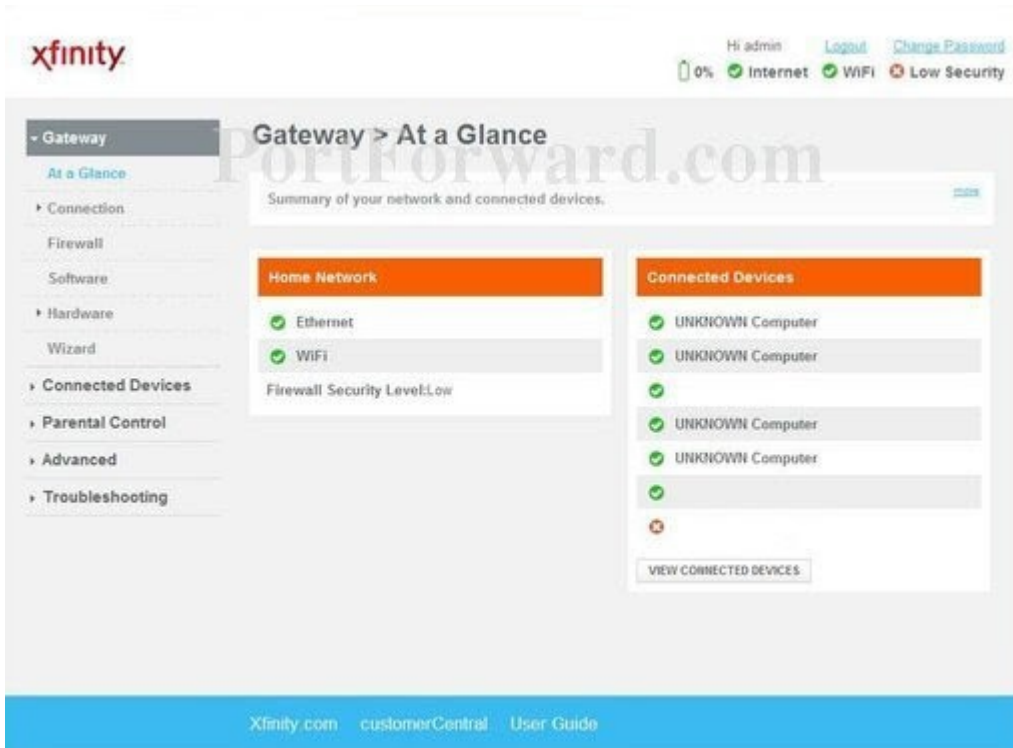

Click the **Advanced** link near the left of the page.

You should now see a new menu. In this new menu, click **Port Forwarding**.



Click the **Add Service** button near the center of the page.

Hi admin Logout Change Password
0% Internet WiFi Low Security

Advanced > Port Forwarding > Add Service

Some text about email notification and how they work.

Add Service

Services Name: Other

Other Service:

Service Type: UDP

Server IP Address:

Start Port:

End Port:

SAVE CANCEL

Xfinity.com customerCentral User Guide

Now fill in as follows..

Other Service: This can be anything this is only for reference.

Service Type : TCP

Server IP Address: IP address of PC

Start Port: 80

End Port: 80

Now click **Save**.

Repeat this step for port 4550, 5550, 8866 and 5511 as well.