

Comcast TC8305C Port Forwarding Setup Instructions for Zavio CamGraba



In the picture above the address bar has <http://www.google.com/> in it. Just replace all of that with the internal IP address of your Technicolor TC8305C router. By default the IP address should be set to 10.0.0.1.




You should see a box prompting you for your username and password. Enter your username and password now.

The Default Username is: **admin**

The Default Password is: **password**

Now that you are logged in to your Technicolor TC8305C router you should see the following:

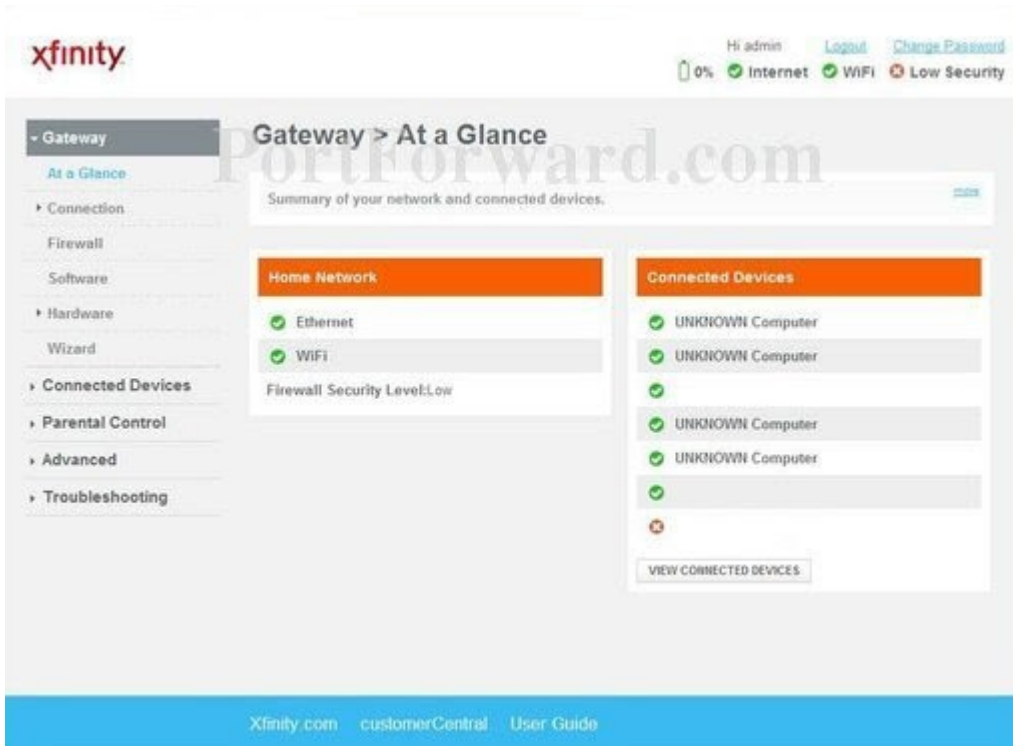

Click the **Advanced** link near the left of the page.

You should now see a new menu. In this new menu, click **Port Forwarding**.



Click the **Add Service** button near the center of the page.

The screenshot shows the Xfinity Advanced Port Forwarding 'Add Service' configuration page. The sidebar on the left includes 'Gateway', 'Connected Devices', 'Parental Control', 'Advanced' (selected), 'Port Forwarding', 'Port Triggering', 'DMZ', 'Dynamic DNS', 'Device Discovery', and 'Troubleshooting'. The main content area has a breadcrumb 'Advanced > Port Forwarding > Add Service' and a text area for email notifications. The 'Add Service' form includes: 'Services Name' dropdown set to 'Other', 'Other Service' text field, 'Service Type' dropdown set to 'UDP', 'Server IP Address' text field, 'Start Port' text field, and 'End Port' text field. 'SAVE' and 'CANCEL' buttons are at the bottom. A watermark 'PortForward.com' is overlaid on the form.

Now fill in as follows..

Other Service: This can be anything this is only for reference.

Service Type : TCP

Server IP Address: IP address of PC

Start Port: 80

End Port: 80

Now click **Save**.

Repeat this step for port 5150 and 5160 as well.