

## Comcast TC8305C Port Forwarding Setup Instructions for iDVR-E



In the picture above the address bar has <http://www.google.com/> in it. Just replace all of that with the internal IP address of your Technicolor TC8305C router. By default the IP address should be set to 10.0.0.1.


A screenshot of the Xfinity router login page. At the top left is the "xfinity" logo. Below it is the heading "Login". A white box contains the text "Please login to manage your router." followed by two input fields: "Username:" and "Password:". A "LOGIN" button is positioned to the right of the password field. At the bottom of the page, there is a blue banner with the text "Xfinity.com customerCentral User Guide" and a large watermark "PortForward.com".

You should see a box prompting you for your username and password. Enter your username and password now.

The Default Username is: **admin**

The Default Password is: **password**

Now that you are logged in to your Technicolor TC8305C router you should see the following:

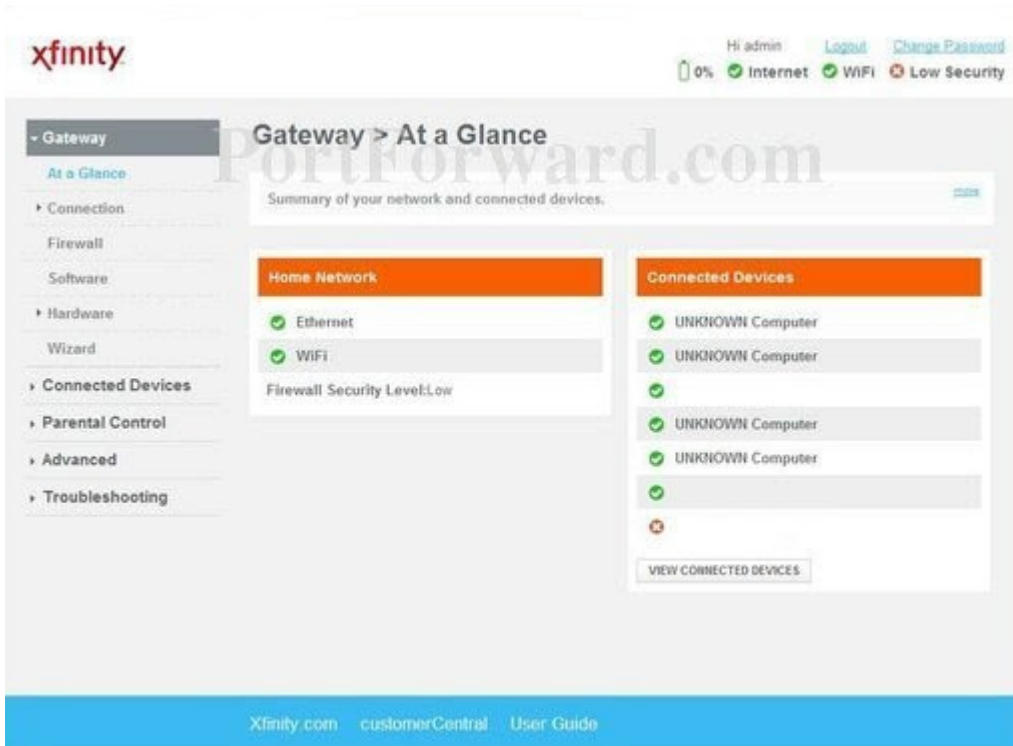

Click the **Advanced** link near the left of the page.

You should now see a new menu. In this new menu, click **Port Forwarding**.



Click the **Add Service** button near the center of the page.

The screenshot shows the Xfinity Advanced Port Forwarding Add Service page. The page has a sidebar on the left with navigation options: Gateway, Connected Devices, Parental Control, Advanced (selected), Port Forwarding, Port Triggering, DMZ, Dynamic DNS, Device Discovery, and Troubleshooting. The main content area is titled "Advanced > Port Forwarding > Add Service". At the top right, there is a user profile "Hi admin" with links for "Logout" and "Change Password", and status indicators for "0%", "Internet", "WiFi", and "Low Security". Below the title, there is a text area with the placeholder "Some text about email notification and how they work." and a "more" link. The "Add Service" form contains the following fields: "Services Name" (dropdown menu with "Other" selected), "Other Service" (text input), "Service Type" (dropdown menu with "UDP" selected), "Server IP Address" (text input), "Start Port" (text input), and "End Port" (text input). At the bottom of the form are "SAVE" and "CANCEL" buttons. A watermark "PortForward.com" is visible across the form.

Now fill in as follows..

**Other Service:** This can be anything this is only for reference.

**Service Type :** TCP

**Server IP Address:** IP address of DVR

**Start Port:** 7000

**End Port:** 7000

Now click **Save**.