


Standalone DVR

iDVR-E8 H.264 Stand Alone DVR



8 Channel, Embedded Linux OS, True H.264 Compression
 Built-in multiplexer, Triplex function - simultaneous record / playback / network
 1 main composite, 1 spot, 1 VGA, Touch Sensitive Front Panel Interface
 USB Flashdrive Backup, Internal HDD (SATA): 1 (Up to 2TB)
 1 Ch Audio with remote Audio over network, Watermark
 Watch dog / Power Failure Recovery, Firmware upgrade via USB
 RS-422/485 for PTZ speed dome and Controller Keyboard
 3 Simultaneous users, Free DDNS Support, USB mouse controlled
Remote View via Android, iPhone, BlackBerry and Windows Mobile Phone
 (Tested in US, Canada, and Korea)

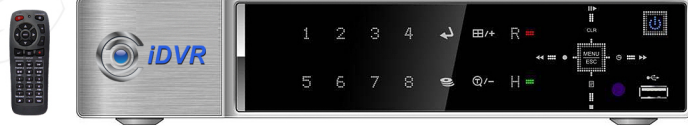

Compatible with Mac OS
 Live Viewing, Playback, Up to 3 users connection



Download Free Mobile App for iPhone & Android phone now!!!
 "Free Mobile CMS" is now available on Android Market and iPhone App Store.

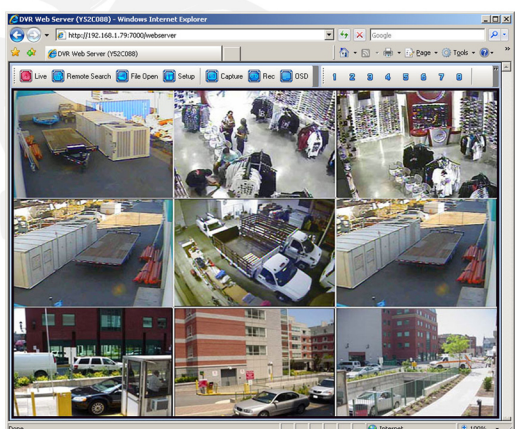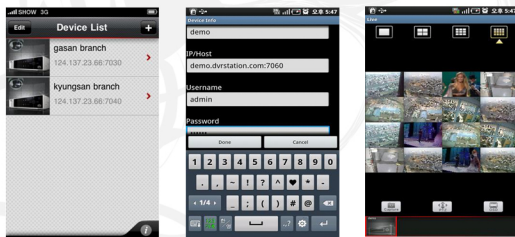

SPECIFICATION

Video Format	NTSC or PAL
Operating System	Embedded Linux
Triplex Function	Simultaneous Record / Playback / Network
Video Input	8
Multiple Main Monitor Outputs	1 Main Composite, 1 Spot, 1 VGA
Video Compression Method	True H.264
Average File Size	2.0 ~ 9.6KB
Max. Recording Rate & Res.	240pps @ 360 x 240, 120pps @ 720 x 240, 60pps @ 720 x 480
Alarm In / Out	8 / 1
Audio In / Out	1 / 1
System Control	Key buttons, IR Remote controller, Remote client PC
PTZ & Controller Interface	RS-422 / RS-485
Display Setting	Brightness, Contrast, Color adjust, Hidden / Covert
Camera Title	12 characters per channel
Recording Modes	Continuous, Schedule, Alarm, and Motion
Recording Adjustments	Frame rate and picture quality adjustment
Pre & Post Alarm Recording	Pre-alarm: 3 sec per CH / Post-alarm: 10 sec ~ 300 sec
Motion Detection	16 selectable grids / 20 sensitivity levels
Search Mode	Time/Date, Camera, Alarm, Motion
Power Failure Recovery	Auto reboot while maintaining previous system settings
E-mail Notification	External alarm, video loss, power loss, HDD failure
System Utility	Auto key lock/ disk check
User Level	1 Admin, 5 Configurable users
Internal Storage Bays	1 Internal HDD bay (Up to 2TB)
Watermark	Provided
Power	100 - 240VAC (50/60), Universal, DC 12V, 36W
Dimension (W x D x H)	11.02" x 12.40" x 2.17"
Weight	4.2 lb