

P-405M (W)


MPEG-4 MegaPixel Network Camera



MAIN FEATURES

- 1.3 Mega pixels up to 1280x1024 resolution
- Self-Contained Web Server providing, Internet capability for remote access
- MPEG-4 / M-JPEG dual streaming (to be firmware upgraded)
- Real-time video recording
- Supports SD card for local recording
- Supports full 2-way audio
- Online firmware upgrade
- Supports DDNS for dynamic IP application
- Recorded file playable with Microsoft Windows Media Player
- Supports 3GPP protocol / WinCE cell phone (to be firmware upgraded)

DIMENSION DIAGRAM

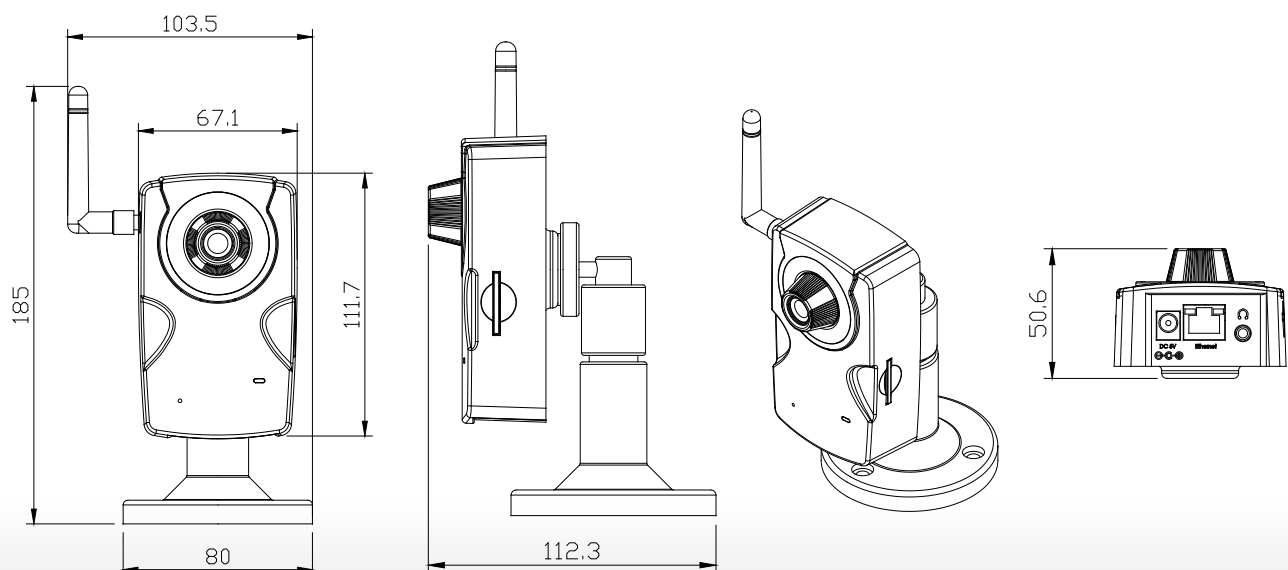

P-405M (W) MPEG-4 MegaPixel Network Camera

Specifications

System	ARM 9, 32 bit RISC Processor, 8 MB Flash ROM, 64MB SDRAM	
Video Compression	MPEG-4 / M-JPEG dual streaming (to be firmware upgraded)	
Video Resolution	SXGA: 1280 x 1024 VGA: 640 x 480 QVGA: 320 x 240 QQVGA: 160 x 120	
Bit Rate	32K ~ 2M bits/sec (CBR/VBR configurable)	
Frame Rate	Up to 30 FPS @ VGA / QVGA / QQVGA, 10 FPS @ SXGA	
Image Device	1/4" CMOS	
Lens Type	Fixed Lens, Focal Length 4.0mm, F2.0	
Minimum Illumination	1.5 Lux @ F2.0	
Video Control	Frame rate, Bit rate (Constant Bit Rate (CBR), Variable Bit Rate (VBR) w/ quality levels), Group of Pictures (GOP) size, Compression Format, Dual Stream (to be firmware upgraded) , 3GPP mode (to be firmware upgraded) , RTSP Path	
Image Adjustment	Brightness, Contrast, Exposure, Sharpness, AGC, Night Mode, Video Orientation	
Event System	Trigger	Motion detection, Network Disconnected, Network IP Check
	Action	FTP, Email, Save to SD card
Local Storage	SD Slot	
Network Interface	10/100 Base-T Ethernet IEEE 802.11b/g wireless LAN (Wireless model)	
Protocols	HTTP, TCP/ IP, UDP, SMTP, FTP, PPPoE, DHCP, DDNS, NTP, 3GPP (to be firmware upgraded) , UPnP	
Audio Capability	1 x Built-in Microphone, 1 x Audio output	
Power Supply	AC/DC switching power adapter, input: AC100 ~240V, output: DC 5V/2A	
Power Consumption	3.9W / 4.9W (Wireless Model)	
Operation Temperature	0°C ~ 45°C	
Operation Humidity	0% ~ 80%	
Dimension (L x W x H)	111mm x 67mm x 51mm	
Net Weight	178 g	
I/O Connectors	1 x RJ-45 Ethernet connector 1 x Built-in Microphone 1 x Audio output 1 x Reset button 1 x DC In connector	
Package Contents	1 x CD (manual and software) 1 x Ethernet cable 1 x ACDC Power Adapter 1 x Tool Pack 1 x Antenna (for P-405MW) 1 x Stand	