

Coaxial Cabling : Video Distributor Amplifier Series


ITEM NO.: AMP-1632 16 Input 32 Output Video Distribution Amplifier

AMP-1632 is video distribution Amplifier with one or multi video input to multi output. Each output built in Brightness and Sharpness adjustment. It takes 2U (3.5 inch) Of space in standard 19" Rack. It's suitable for far distance, different floor in a building or different electrical field.

Features:

- Wide bandwidth, video gain compensation amplification.
- HF compensation.
- 10dB adjustable image gain.
- Sharpness and Brightness adjustment.
- Transmission range: 1000 meters (RG59 coaxial cable).
- Red LED: power on/off.
- It can be connected video camera, multiplexer, VCR, DVR...etc.
- Power supply included.

View of Installation:

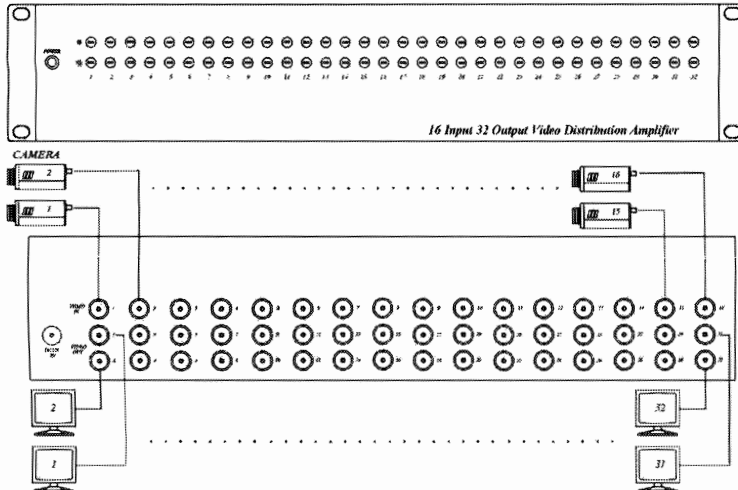

Specifications:

Item NO.	AMP-1632
Video Input Channel	16
Video Output Channel	32
Video Input Level	0.8~1.2Vp-p, 75 Ohms
Video Bandwidth	10hz - 10MHz
Power Supply	DC12V/500mA
Power Consumption	480mA
Brightness	V
Sharpness	V
Storage Temperature	0 ~80 °C
Operation Temperature	0~ 40 °C
Dimensions W x H x D mm	483 x 88 x 44mm (59 with BNC) (2U height)
Weight g	1400
Material	Metal Black

RoHS CE FC