

# F7520

Box Camera  
5MP Box Camera

[www.zavio.com](http://www.zavio.com)

**ZAVIO**  
Innovating IP since 2006



\* Lens to be purchased separately

- . 1/1.8" 5MP CMOS sensor
- . 3D DNR
- . Micro SD/SDHC/SDXC card slot up to 128GB
- . Compatible with C/CS-mount lenses
- . ROI (Region Of Interest)
- . Two way audio (full duplex)
- . Smart Codec + H.265
- . Corridor mode
- . 1 alarm in / 1 alarm out
- . 5MP @ 30fps
- . Defog
- . 12V DC & PoE (802.3af)
- . 100dB WDR
- . Operating conditions -20~60°C
- . ONVIF 2.4 & Profile S

ZAVIO F7520 fixed box camera is full featured, yet compact and affordable. Latest H.265 compression to cut bandwidth in half, with ZAVIO's smart codec feature further lowering bandwidth and storage consumption to 80% less than normal H.264 cameras. Huge 1/1.8" Sony sensor with 5MP resolution @ 30 fps that gives the most details. True WDR to handle the most challenging lighting conditions. Superior low-light sensitivity that still sees when you don't.

F7520 supports DC-Iris C/CS-mount lenses, giving you maximum flexibility to suit your requirements. Ideal for numerous application such as home, office, and even hallways and aisles with its corridor mode. Compatible with ZAVIO CamGraba 2.0, the most professional free NVR software that can support up to 64 IP cameras.

## Optional accessories


Accessory: Outdoor enclosure  
Item number: AF-M01  
Dimensions: 462.7(L) x 171(W) x 256(H)mm  
Compatible with: F7220, F7320, F7520



## Features

### Smart Codec + H.265

ZAMO Smart Codec + H.265 reduces bandwidth and storage requirements by a stunning 80% compared to standard H.264 camera.

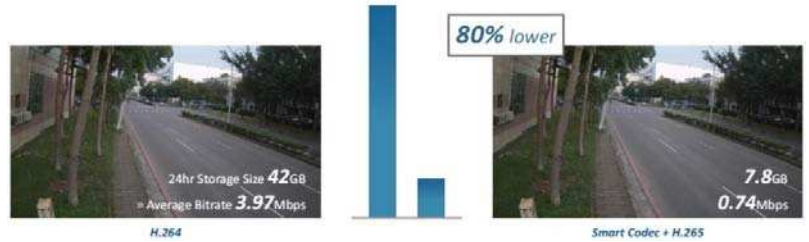

WDR off



WDR on

### WDR

Cameras with WDR will take multiple exposures of the full scene and merge them together to provide an image that extends further than the human eye can perceive.

### ROI (Region Of Interest)

Defining a Region Of Interest will allow you to spend less bandwidth in areas that are less important while relocating resolution on the most relevant areas.



Landscape mode



Corridor mode

### Corridor mode

Corridor Mode allows you to get a vertically oriented video stream from the camera, maximizing image quality while eliminating bandwidth and storage waste.

## Technical Specifications

Camera	
Camera Type	5MP Box Camera
Image sensor	1/1.8" CMOS sensor
Lens	C/CS-mount
Horizontal view angle	-
IR working distance	-
Min illumination	0.05 lux @ F1.5 (color) 0.005 lux @ F1.5 (B/W)
WDR	100dB
Day/ Night function	Mechanical IR cut filter

Video & Audio	
Resolutions	Motion JPEG/H.264/H.265: 2 Profile from 2560 x 1920 to 320 x 240 (total 6 resolutions) 2 Profile from 640 x 480 to 640 x 360 (total 2 resolutions)
Video compression	Motion JPEG H.264 baseline/ main profile/high profile H.265
Frame rate	H.265/H.264: up to 60 fps at 1080p, 30fps at 5MP Motion JPEG: up to 30 fps at 1080p, 10fps at 5MP
Video streaming	Simultaneous Motion JPEG, H.264, H.265 Controllable frame rate and bandwidth Support unicast (Real Time Streaming Protocol)
Image settings	Rotation: mirror, flip, mirror flip, corridor mode Brightness, contrast, saturation, sharpness Overlay capabilities: time, date, text and privacy Image ROI 3D DNR Defog
Audio support	Two-way (full duplex)
Audio compression	G.711 u law, a law, G.726, AMR

I/O & Connector	
Ethernet	RJ45 Ethernet 10/100 Base-T
Power Supply	Terminal block, 12V DC, 1A Power consumption: Max 4W PoE(Power over Ethernet) built-in IEEE 802.3af
Alarm I/O	Terminal block, 1/1
Audio connector	3.5mm Phone Jack, line in & line out
Analog video output	BNC
RS-485	Terminal block
Edge storage	Micro SD/SDHC/SDXC up to 128GB
Buttons	Reset push button
Other(s)	USB connector

Alarm & Event	
Input	Alarm buffer, alarm input, motion detection, audio detection, periodical, network link down.
Output	Network storage, edge storage, FTP, SMTP, HTTP event, HTTPS alarm out pre and post event image.

Network	
Users	10 simultaneous users
Security	Multiple user access levels with password protection, HTTPS encryption
Supported protocols	IPv4, IPv6, Bonjour, TCP/ IP, DHCP, DNS, DynDNS, PPPoE, ARP, ICMP, FTP, SMTP, NTP, UPnP, RTSP, RTP, RTCP, HTTP, HTTPS, SSL, TCP, UDP
ONVIF	2.4 & Profile S

General	
Housing	Aluminum Alloy
Ingress Protection	-
Impact Protection	-
Other(s)	-
Operating conditions	Starting temperature: -10 ~ 60°C Humidity 10-100% RH Working temperature: -20~60°C Humidity 10-100% RH
Dimensions(HxWxD)	147.80 x 80.67 x 70.99mm
Weight	524.2g exd. power supply
Included accessories	Quick installation guide, hex wrench, C-mount adaptor.
Optional accessories	Outdoor enclosure (with optional PoE, IR, Heater, Fan)
Certification	CE, FCC, RoHS
Language	Chinese, Croatian, Czech, Danish, Dutch, English, French, German, Greek, Hungarian, Italian, Japanese, Korean, Polish, Portuguese, Russian, Slovak, Spanish, Swedish, Turkish

System Requirements	
Operating system	Windows XP/ 7 / 8 / 8.1, MacOS, Linux
Browser	Internet Explorer 9 / 10 / 11, Chrome, Firefox, Safari

Software	
Video management software	ZAVO CamGraba 2.0 IP System software, for viewing, recording and archiving up to 64 cameras.
Installation, management and maintenance	ZAVO Installation Tool makes camera management easier with camera image preview, firmware upgrade of multiple cameras, reset cameras to default while keeping network settings, etc.

